

# BRAVADO TWIN ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Installation Method	Adjustable Recessed
Cutout Size (mm)	260mmx125mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Tilt Angle	20°

## ELECTRICAL

Wattage	40W, 56W
Forward Current	500mA, 700mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



RoHS

## O P T I C A L


Optic	Reflector
Distribution	Narrow / Medium / Wide
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	3782lm - 5772lm
System Efficacy	Up to 118lm/W
Light Output Ratio	70
Lifetime (L70B50)	50000hrs

## A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years



**IP20**

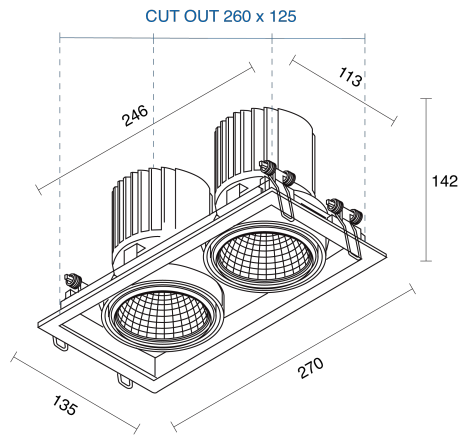

**Bravado Twin**