


# MEENY ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø75mm
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Rotate Angle	360°
Tilt Angle	25°

## ELECTRICAL

Wattage	8W, 10W
Forward Current	180mA, 250mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable



RoHS




**O P T I C A L**

Optic	Reflector
Distribution	Medium 28°
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	553lm - 724lm
System Efficacy	Up to 76lm/W
Light Output Ratio	70
Lifetime (L70B50)	50000hrs

**IP20****A D D I T I O N A L**

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	3 Years

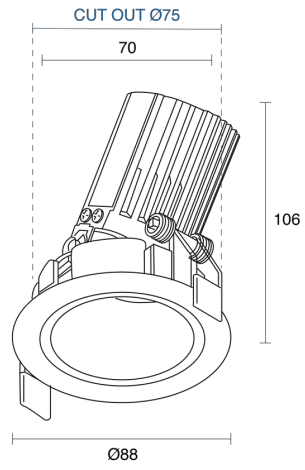

**Meeny**