

OLIO SQUARE ADJUSTABLE RECESSED

CREATE | INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

| | |
|----------------------------|--|
| Size | XS, S, M |
| Installation Method | Adjustable Recessed |
| Cutout Size (mm) | 45mm x 45mm, 68mm x 68mm, 96mm x 96mm |
| Accessories | Honeycomb Louvre, Without Accessory |
| IP Rating | IP20 |
| Finish | Textured White, Textured Black, Custom |
| Rotate Angle | 355° |
| Tilt Angle | 30° |
| Anti-Glare Ring Finish | Textured Black, Custom |
| Secondary Reflector Finish | Matt, Textured White, Textured Black, Specular, Chrome, Gold, Custom |



RoHS

ELECTRICAL

| | |
|-----------------|---|
| Wattage | 6W, 9W, 13W, 15W, 21W |
| Forward Current | 250mA, 350mA, 500mA |
| Voltage | 240V |
| Dimming Control | 1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable |

O P T I C A L


| | |
|--------------------|--------------------------------|
| Optic | Lens, Reflector |
| Distribution | Medium / Narrow / Wide / Flood |
| CCT | 2700K, 3000K, 4000K |
| CRI | CRI90 |
| System Lumen | 365lm - 1150lm |
| System Efficacy | Up to 69lm/W |
| Light Output Ratio | 85 |
| Lifetime (L70B50) | 50,000hrs |

A D D I T I O N A L


| | |
|------------|---------------|
| LED Module | CREE, Citizen |
| LED Driver | Remote |
| Warranty | 5 Years |




IP20

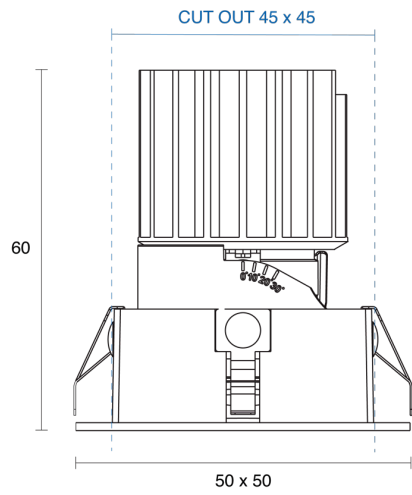

Olio XS Square

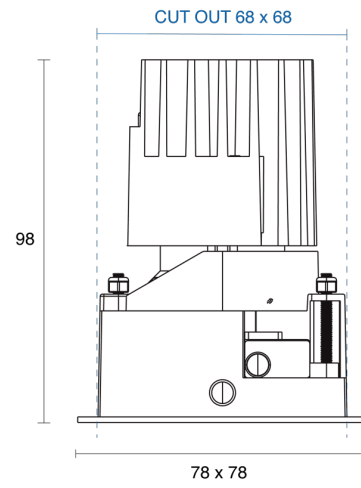

Olio S Square

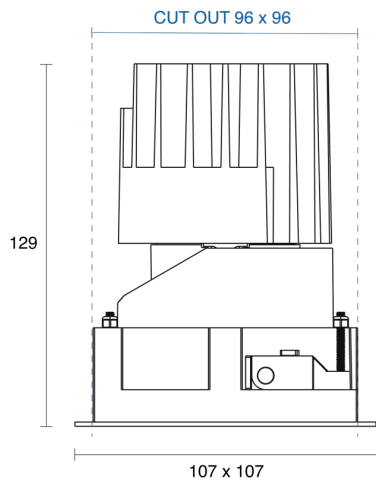

Olio M Square