

# KIT ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø91mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	White, Black, Custom
Rotate Angle	360°
Tilt Angle	35°

## ELECTRICAL

Wattage	8W, 10W, 15W, 20W
Forward Current	180mA, 250mA, 350mA, 500mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable

NARROW



MEDIUM



WIDE



FLOOD



RoHS

## O P T I C A L


Optic	Reflector, Reflector+Lens
Distribution	Narrow / Medium / Wide / Flood
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	812lm - 1835lm
System Efficacy	Up to 115lm/W
Light Output Ratio	85
Lifetime (L70B50)	50000hrs


## A D D I T I O N A L

LED Module	Standard Tridonic SLE G7
LED Driver	Remote
Warranty	5 Years



**IP20**



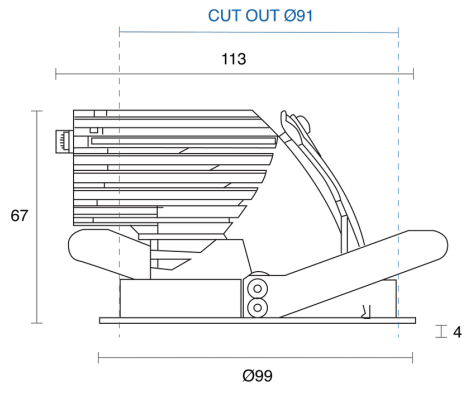

Kit