

# KIT MINI TRIMLESS ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK



## PHYSICAL

Size	XS, S
Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø60mm, Ø90mm
Accessories	Honeycomb Louvre, Softening Lens, Honeycomb Louvre (pre-fitted), Without Accessory
IP Rating	IP20, IP44
Finish	White, Black, Textured White, Textured Black, Custom
Rotate Angle	350°, 360°
Tilt Angle	25°, 30°

## ELECTRICAL

Wattage	7W, 8W, 9W, 10W, 15W, 20W
Forward Current	180mA, 200mA, 250mA, 350mA, 500mA
Voltage	24V, 240V
Dimming Control	1-10V Dimmable, Casambi Dimmable, DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable





**O P T I C A L**

Optic	Lens+Film, Reflector, Reflector+Lens
Distribution	Spot / Narrow / Medium / Wide / Flood
CCT	2200K, 2400K, 2700K, 3000K, 4000K
CRI	CRI90
System Lumen	154lm - 1654lm
System Efficacy	Up to 104lm/W
Light Output Ratio	85
Lifetime (L70B50)	50000hrs


**A D D I T I O N A L**

LED Module	CREE LED XEG , Ledteen 3mm, Ledteen 4mm, Luminus CXM-3, Luminus CXM-4, Standard Tridonic SLE G7
LED Driver	Remote
Warranty	5 Years

**RoHS****IP20****IP44**

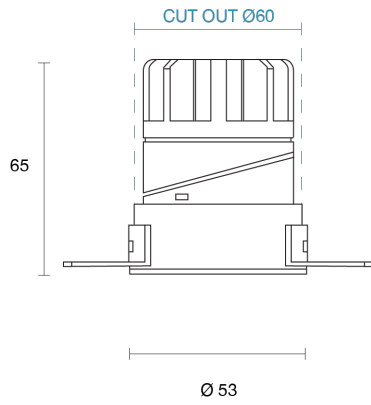

**Kit Mini XS Trimless**

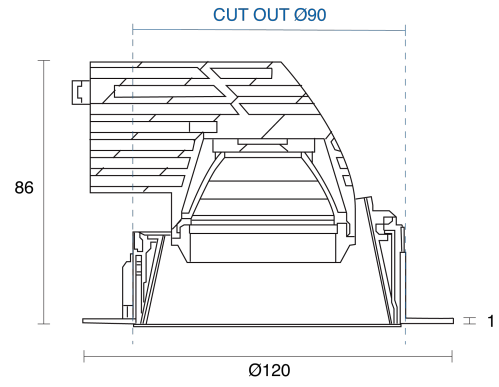

**Kit Mini S Trimless**