

SILO FIXED SURFACE MOUNTED

INDOOR / SPOTLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Fixed Surface Mounted
Accessories	Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom

ELECTRICAL

Wattage	28W, 35W
Forward Current	700mA, 900mA
Voltage	240V
Dimming Control	DALI Dimmable, Non-Dimmable



RoHS





O P T I C A L

Optic	Reflector
Distribution	Flood 81°
CCT	3000K, 4000K
CRI	CRI90
System Lumen	2530lm - 3395lm
System Efficacy	Up to 103lm/W
Light Output Ratio	80
Lifetime (L70B50)	50000hrs

IP20**A D D I T I O N A L**

LED Module	Citizen
LED Driver	Integral
Warranty	3 Years

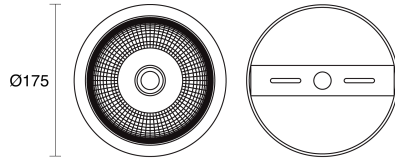

Silo