

ABACO TRACK MOUNTED

INDOOR / TRACKLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

| | |
|---------------------|--|
| Size | XS, S |
| Installation Method | Track Mounted |
| Accessories | Without Accessory |
| IP Rating | IP20 |
| Finish | Textured White, Textured Black, Custom |
| Rotate Angle | 355° |
| Tilt Angle | 90° |

ELECTRICAL

| | |
|-----------------|-----------------------------|
| Wattage | 21W, 28W |
| Forward Current | 500mA, 700mA |
| Voltage | 240V |
| Dimming Control | DALI Dimmable, Non-Dimmable |



RoHS




O P T I C A L


| | |
|--------------------|-----------------|
| Optic | Diffuser |
| Distribution | Flood |
| CCT | 3000K, 4000K |
| CRI | CRI80 |
| System Lumen | 1360lm - 2120lm |
| System Efficacy | Up to 76lm/W |
| Light Output Ratio | 80 |
| Lifetime (L70B50) | 50000hrs |

IP20**A D D I T I O N A L**

| | |
|------------|-----------|
| LED Module | SMD Seoul |
| LED Driver | Integral |
| Warranty | 3 Years |

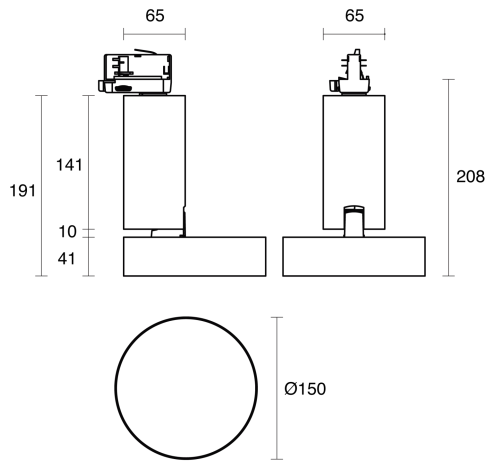

Abaco XS

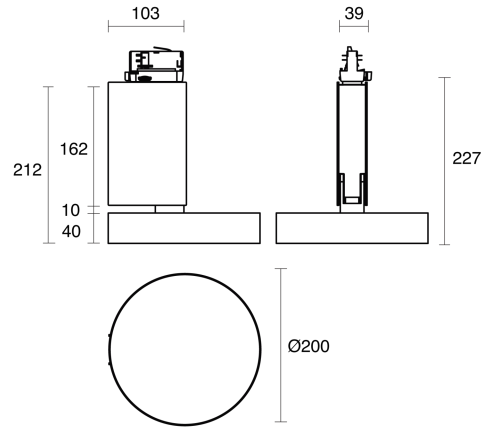

Abaco S