

ABACO SUSPENDED (SURFACE CANOPY)

INDOOR / PENDANT

ambience

MAKING LIGHT WORK



PHYSICAL

Size	XS, S, M, L
Installation Method	Flex Suspended
Accessories	Surface Mounted Canopy
IP Rating	IP20
Finish	Textured White, Textured Black, Custom

ELECTRICAL

Wattage	13W, 28W, 36W, 45W
Forward Current	350mA, 700mA, 900mA, 1050mA
Voltage	240V
Dimming Control	DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable



RoHS




O P T I C A L


Optic	Diffuser
Distribution	Flood
CCT	3000K, 4000K
CRI	CRI80
System Lumen	940lm - 4220lm
System Efficacy	Up to 94lm/W
Light Output Ratio	80
Lifetime (L70B50)	50000hrs

IP20**A D D I T I O N A L**


LED Module	SMD Seoul
LED Driver	Integral, Remote
Warranty	3 Years

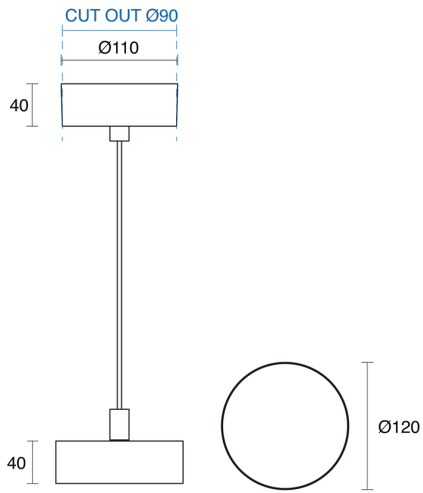


Abaco XS

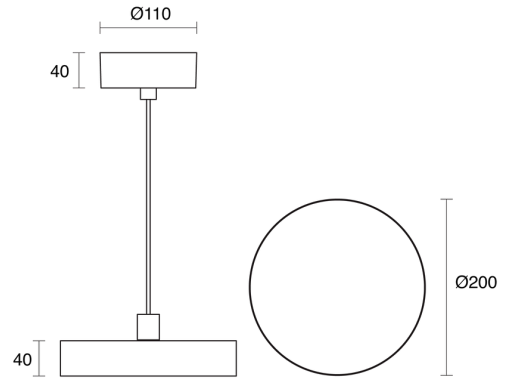

Abaco S

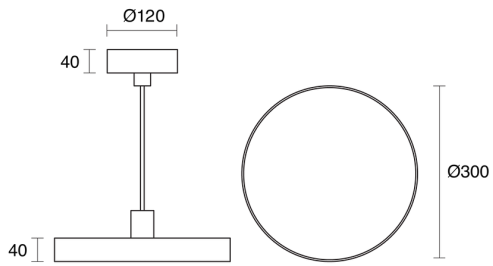

Abaco M

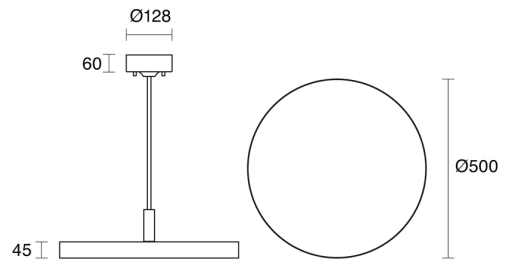

Abaco L