

# ABACO SUSPENDED (SURFACE CANOPY)

INDOOR / PENDANT

ambience

MAKING LIGHT WORK



## PHYSICAL

Size	XS, S, M, L
Installation Method	Flex Suspended
Accessories	Surface Mounted Canopy
IP Rating	IP20
Finish	Textured White, Textured Black, Custom

## ELECTRICAL

Wattage	13W, 28W, 36W, 45W
Forward Current	350mA, 700mA, 900mA
Voltage	240V
Dimming Control	DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable



RoHS




**O P T I C A L**


Optic	Diffuser
Distribution	Flood
CCT	3000K, 4000K
CRI	CRI80
System Lumen	940lm - 4220lm
System Efficacy	Up to 94lm/W
Light Output Ratio	80
Lifetime (L70B50)	50000hrs

**IP20****A D D I T I O N A L**


LED Module	SMD Seoul
LED Driver	Integral, Remote
Warranty	3 Years

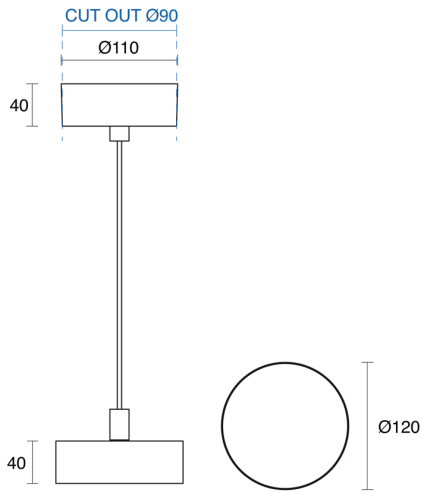


**Abaco XS**

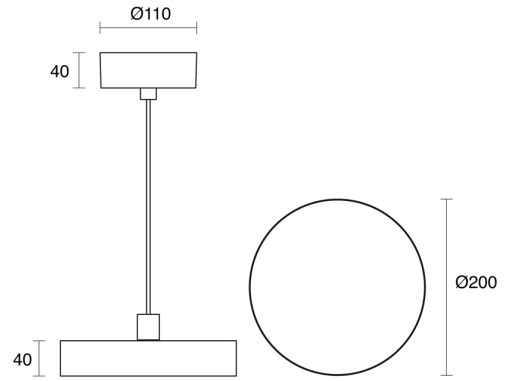

**Abaco S**

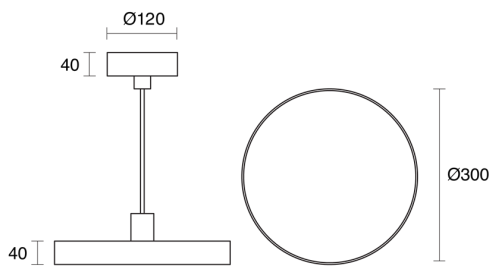

**Abaco M**

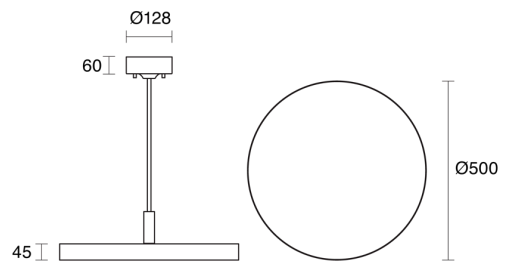

**Abaco L**