

SODA HIGHBAY ALUMINIUM SUSPENDED

INDOOR / GENERAL

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Flex Suspended
Accessories	Without Accessory
IP Rating	IP20
Finish	White, Black, Custom

ELECTRICAL

Wattage	20W, 26W, 34W, 38W, 45W, 52W
Forward Current	500mA, 700mA, 900mA, 1050mA, 1200mA, 1400mA
Voltage	240V
Dimming Control	DALI Dimmable, Non-Dimmable, Phase-Cut Dimmable




O P T I C A L

Optic	Reflector
Distribution	Narrow / Medium / Wide / Flood
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	1803lm - 5995lm
System Efficacy	Up to 115lm/W
Light Output Ratio	78
Lifetime (L70B50)	50000hrs

RoHS**IP20****A D D I T I O N A L**

LED Module	Standard Tridonic SLE G7
LED Driver	Integral
Warranty	5 Years

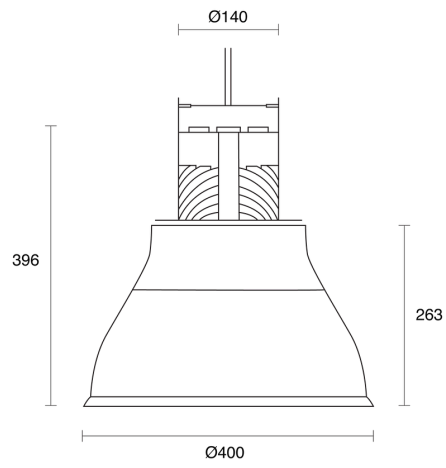

Soda Highbay Aluminium