

BRISE ADJUSTABLE SURFACE MOUNTED

INDOOR / SPOTLIGHT

ambience

MAKING LIGHT WORK



PHYSICAL

Installation Method	Adjustable Surface Mounted
Accessories	Without Accessory
IP Rating	IP40
Finish	Textured White, Bronze Anodique Matt, Textured Black, Corten, Sand, Custom

ELECTRICAL

Wattage	1W, 3W
Forward Current	350mA, 700mA
Voltage	2.5-3V (Vf)
Dimming Control	All dimming types (driver to be ordered separately)



RoHS

O P T I C A L


Optic	Lens
Distribution	Narrow / Medium / Flood
CCT	2700K, 3000K, 4000K, 5000K, Blue, Green, Red
CRI	CRI90
System Lumen	37lm - 255lm
System Efficacy	Up to 138lm/W
Light Output Ratio	80
Lifetime (L70B50)	50,000hrs

A D D I T I O N A L

LED Module	Nichia
LED Driver	Remote
Warranty	2 Years
Add-Ons	IK06 Rated,



IP40

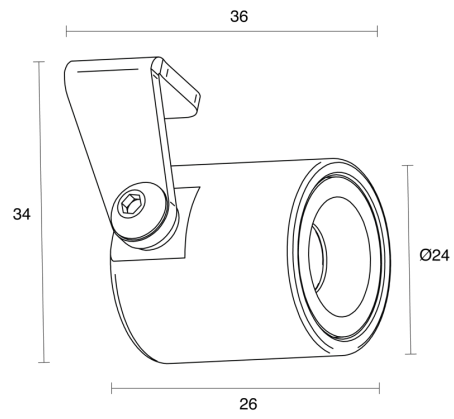

Brise