


CRIO R ADJUSTABLE RECESSED

INDOOR / DOWNLIGHT

ambience

MAKING LIGHT WORK

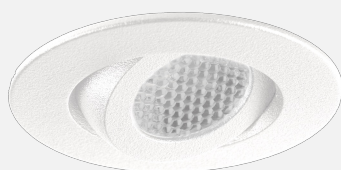

PHYSICAL

Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø40mm
Accessories	Without Accessory
IP Rating	IP40
Finish	Textured White, Anodized Aluminium, Textured Black, Custom
Rotate Angle	360°
Tilt Angle	30°

ELECTRICAL

Wattage	2W
Forward Current	500mA
Voltage	2.5-3V (Vf)
Dimming Control	All dimming types (driver to be ordered separately)

SPOT



WIDE



FLOOD



CE

RoHS

O P T I C A L


Optic	Lens
Distribution	Spot / Wide / Flood
CCT	2700K, 3000K, 4000K, 5000K, Blue, Green, Red
CRI	CRI90
System Lumen	53lm - 189lm
System Efficacy	Up to 95lm/W
Light Output Ratio	80
Lifetime (L70B50)	50,000hrs

A D D I T I O N A L

LED Module	Nichia
LED Driver	Remote
Warranty	2 Years
Add-Ons	IK06 Rated



IP40

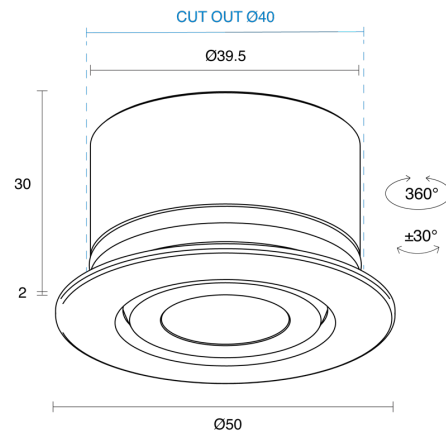

Crio R