



EXTERIOR

OUTDOOR RANGE

WALL / STEP LIGHT	3
Downunder Out	4
Eclipse Family	7
Firefly	10
Flatt Wall Light	14
Step Family	16
Twiggy	19
Wall Step	22
DOWNLIGHT / SPOTLIGHT	25
Andro	26
Pireq IP	29
INGROUND	32
Altea	33
Hydrofloor Invisa	36
FLOODLIGHT	39
Zeus	40
DECORATIVE	43
Rotoball Swing	44
Stella	47

WALL / STEP LIGHT





SLV

WALL / STEP LIGHT

DOWNUNDER OUT

DOWNUNDER OUT key features

FINISHES

- Anthracite

TECHNICAL DESIGN


- LED
- 3000K / 4000K Dual Switch
- Ballast Integral
- 240V
- 4.5W
- Forward Current 500mA
- CRI 80
- 140lm
- Asymmetric Beam Angle Distribution
- IP Rating IP65
- Non-Dimmable
- Material Aluminum
- Lifetime 30000hrs

DESIGN

- Architectural Finish
- Compact Size
- Restrained Distribution
- Delicate Illumination
- Robust Design



Round Step Light

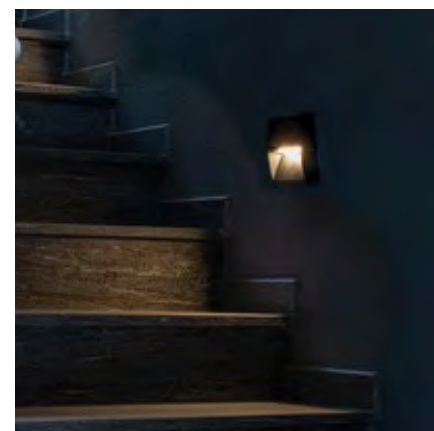



Square Step Light



DOWNUNDER OUT ROUND



DOWNUNDER OUT SQUARE

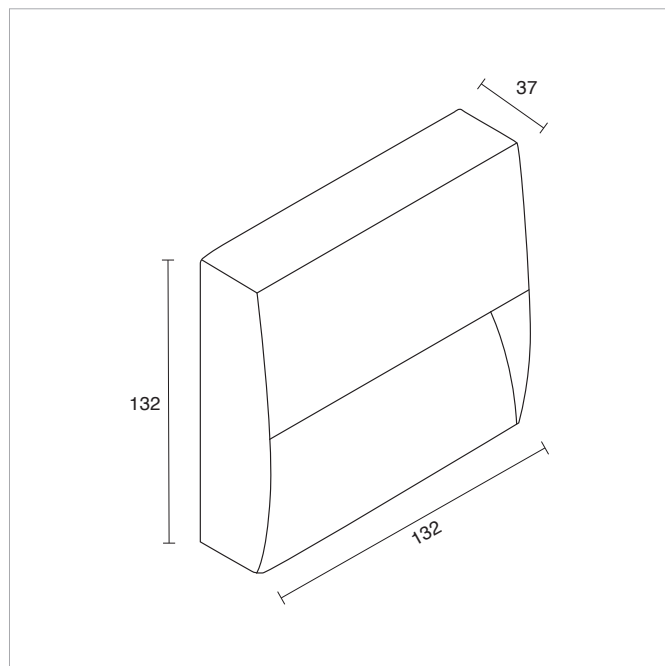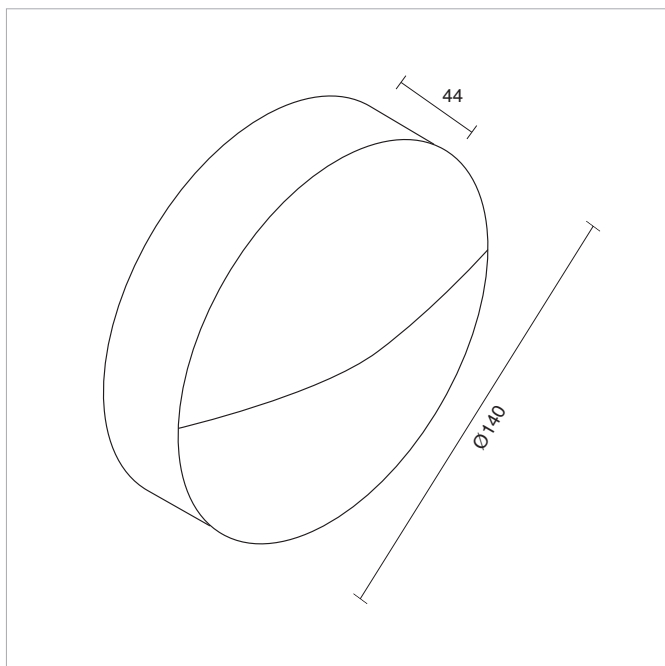



p.u.k.

WALL / STEP LIGHT

ECLIPSE

ECLIPSE key features

SIZES

XS

S

FINISHES

- Anthracite Grey
- Textured Grey
- Matt Black
- Concrete Grey

TECHNICAL DESIGN

CREE LED

3000K / 4000K

Surface Mounted

Ballast Integral

240V

9W / 12W

CRI 80

360° Beam Angle Distribution

IP Rating IP65

IK Rating IK08

Non-Dimmable

Warranty 5 Years

DESIGN

Natural Finish

Compact Size

Restrained Distribution

Delicate Illumination





Robust Design



Textured Grey



Concrete Grey

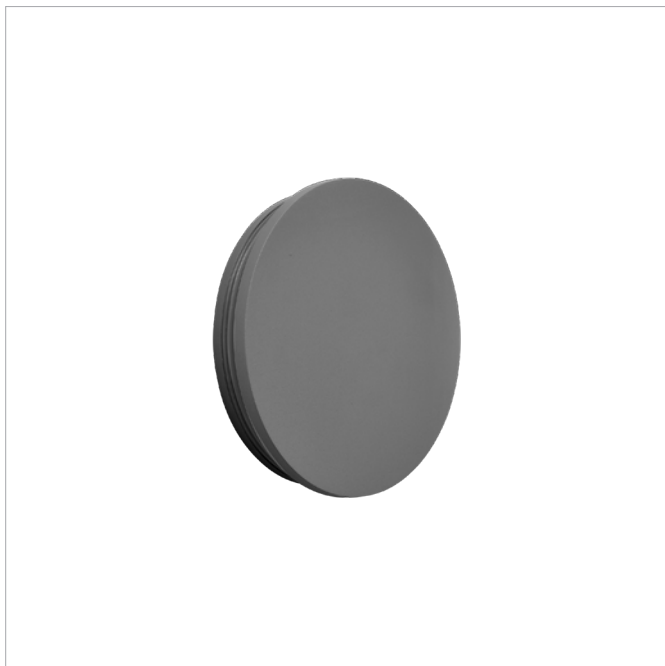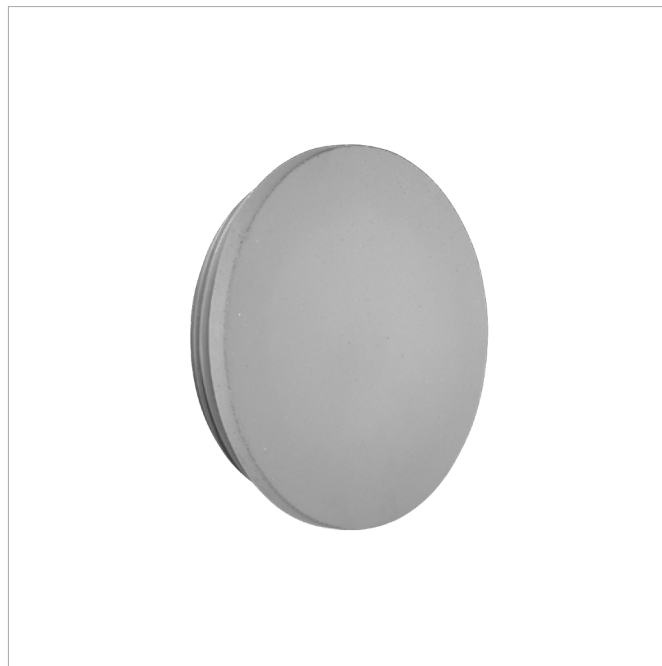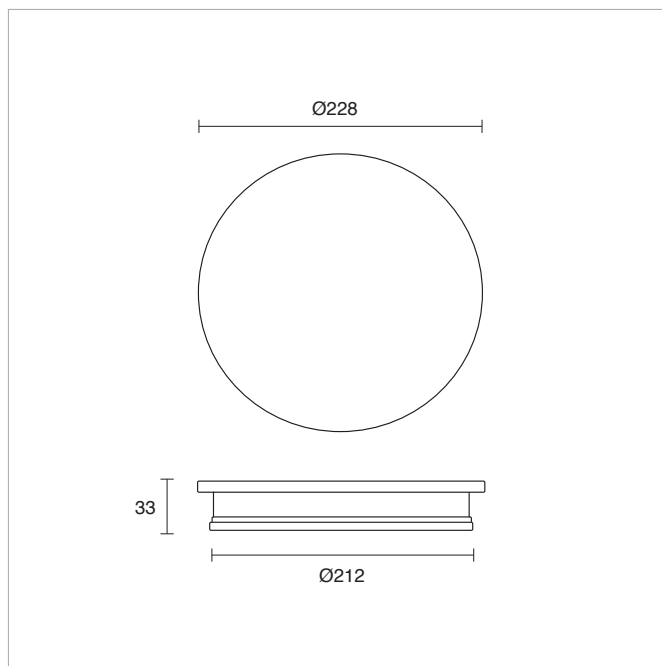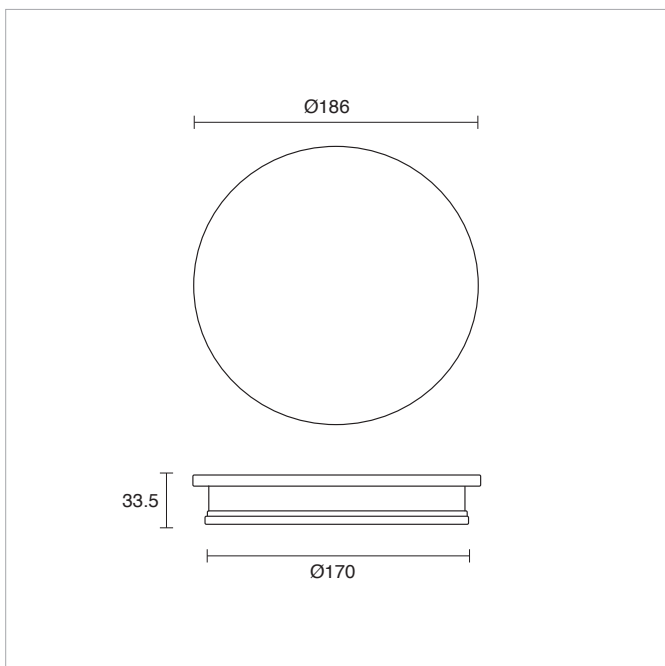**ECLIPSE XS ANTHRACITE GREY****ECLIPSE S CONCRETE**



WALL / STEP LIGHT

FIREFLY

FIREFLY key features

FINISHES

- Aged Brass
- Brushed Brass
- Black
- White
- Custom

ACCESSORIES

- Honeycomb Louvre
- Diffuser Lens

TECHNICAL DESIGN

- CREE XHP-50 Gen 2
- 2700K / 3000K / 4000K
- Ballast Remote
- Constant Current
- 6W / 9W
- CRI 80
- 476lm / 780lm
- 10° / 21° / 33°, Elliptical 26°x 41°
Beam Angle Distribution
- IP Rating IP65
- Non-Dim / Phase-Cut /
0-10V / DALI
- Optic Glass Lens
- 2-Year Warranty

DESIGN

- Textured Finish
- Machined Metal
- Honeycomb Lens
- Compact Size
- Even Distribution
- Robust Design



Down Wall Light Aged Brass



Pillar Black





Spike Inground White



FIREFLY PILLAR



FIREFLY SPOT

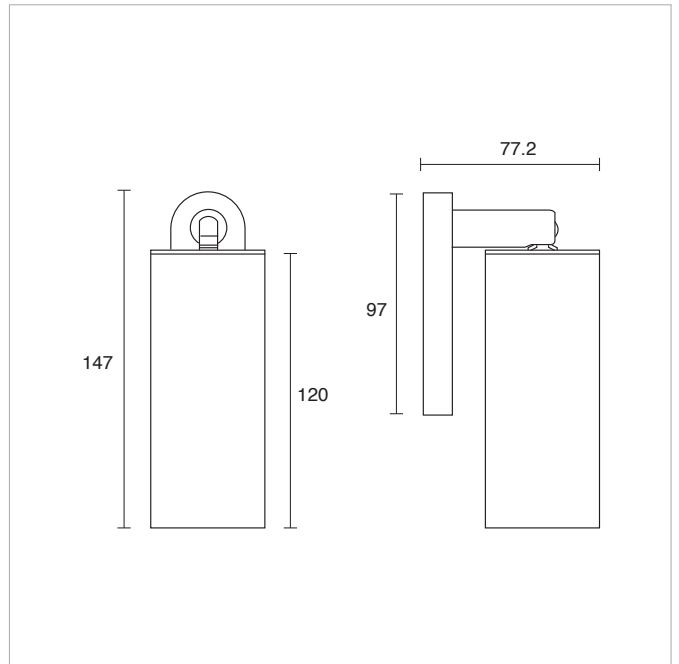
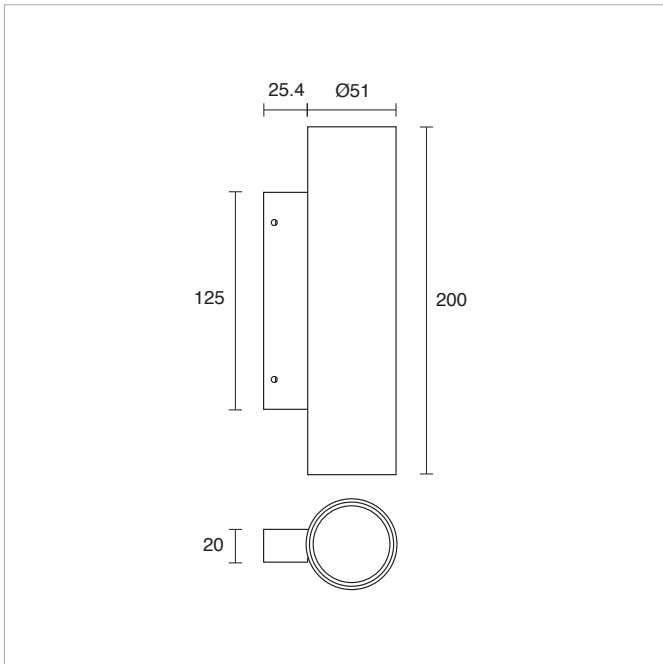





FIREFLY FIXED DOWN WALL LIGHT



FIREFLY SPIKE INGROUND

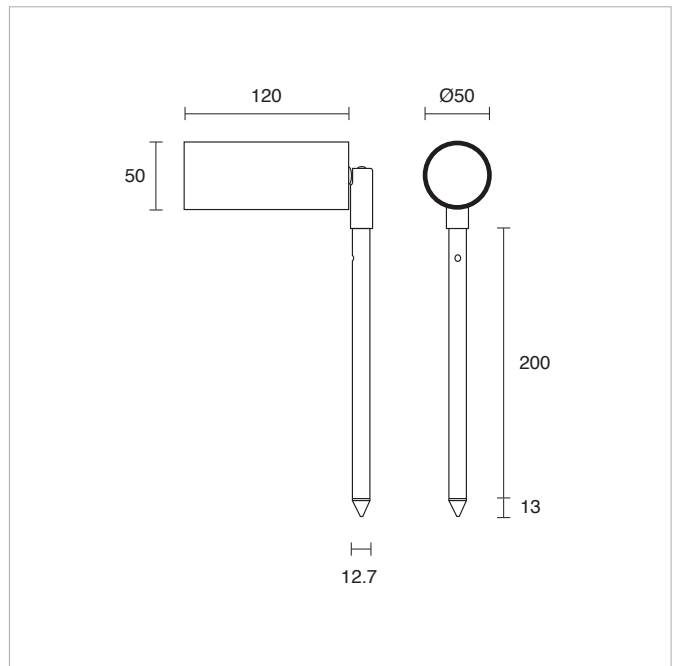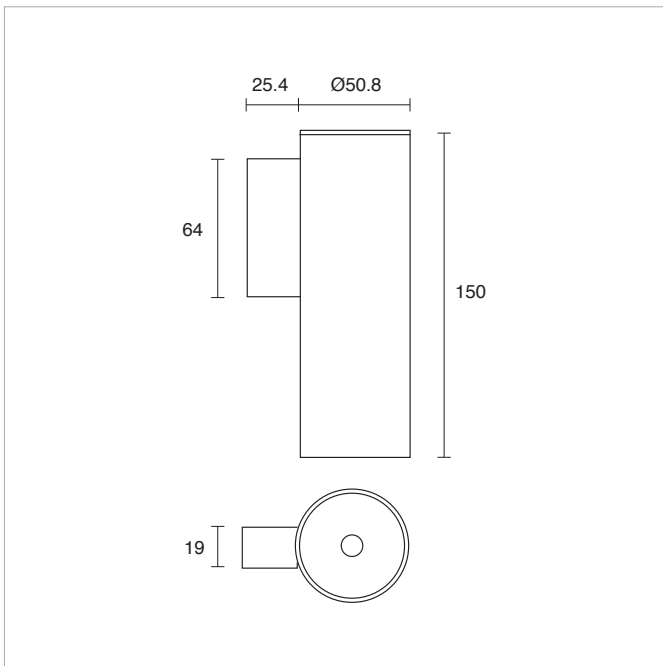



FLATT key features

FINISHES


- Anthracite
- Brown

TECHNICAL DESIGN


- LED
- 3000K / 4000K Dual Switch
- Ballast Integral
- 14W
- Forward Current 300mA
- CRI 80
- 500lm
- Asymmetric Beam Angle Distribution
- IP Rating IP65
- IK Rating IK03
- Non-Dimmable
- Material Aluminum
- Lifetime 54000hrs

DESIGN


- Architectural Design
- Natural Finish
- Compact Size
- Even Distribution
- Controlled Illumination
- Robust Design

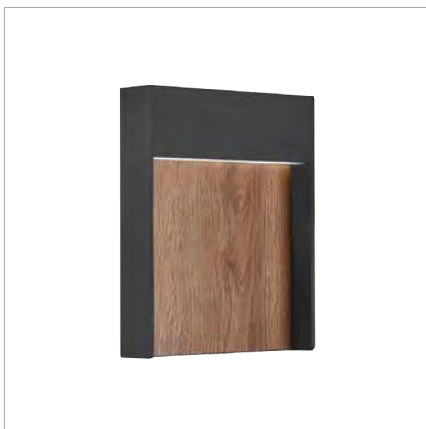


Easy fit

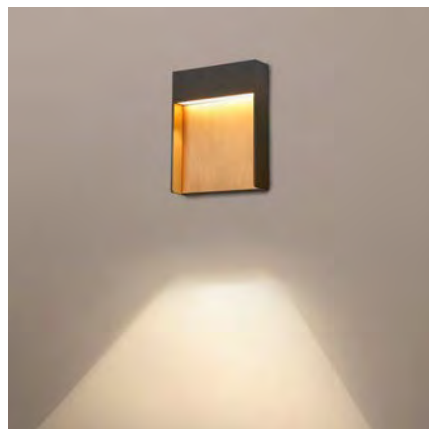

Fantastic illumination

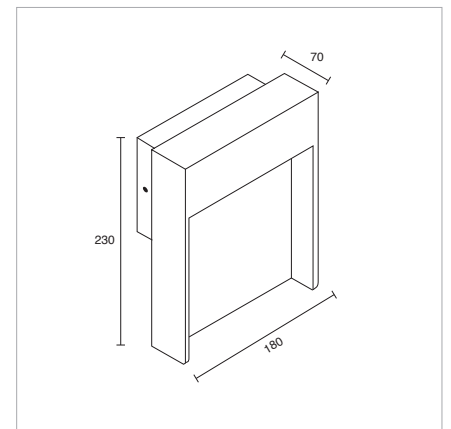

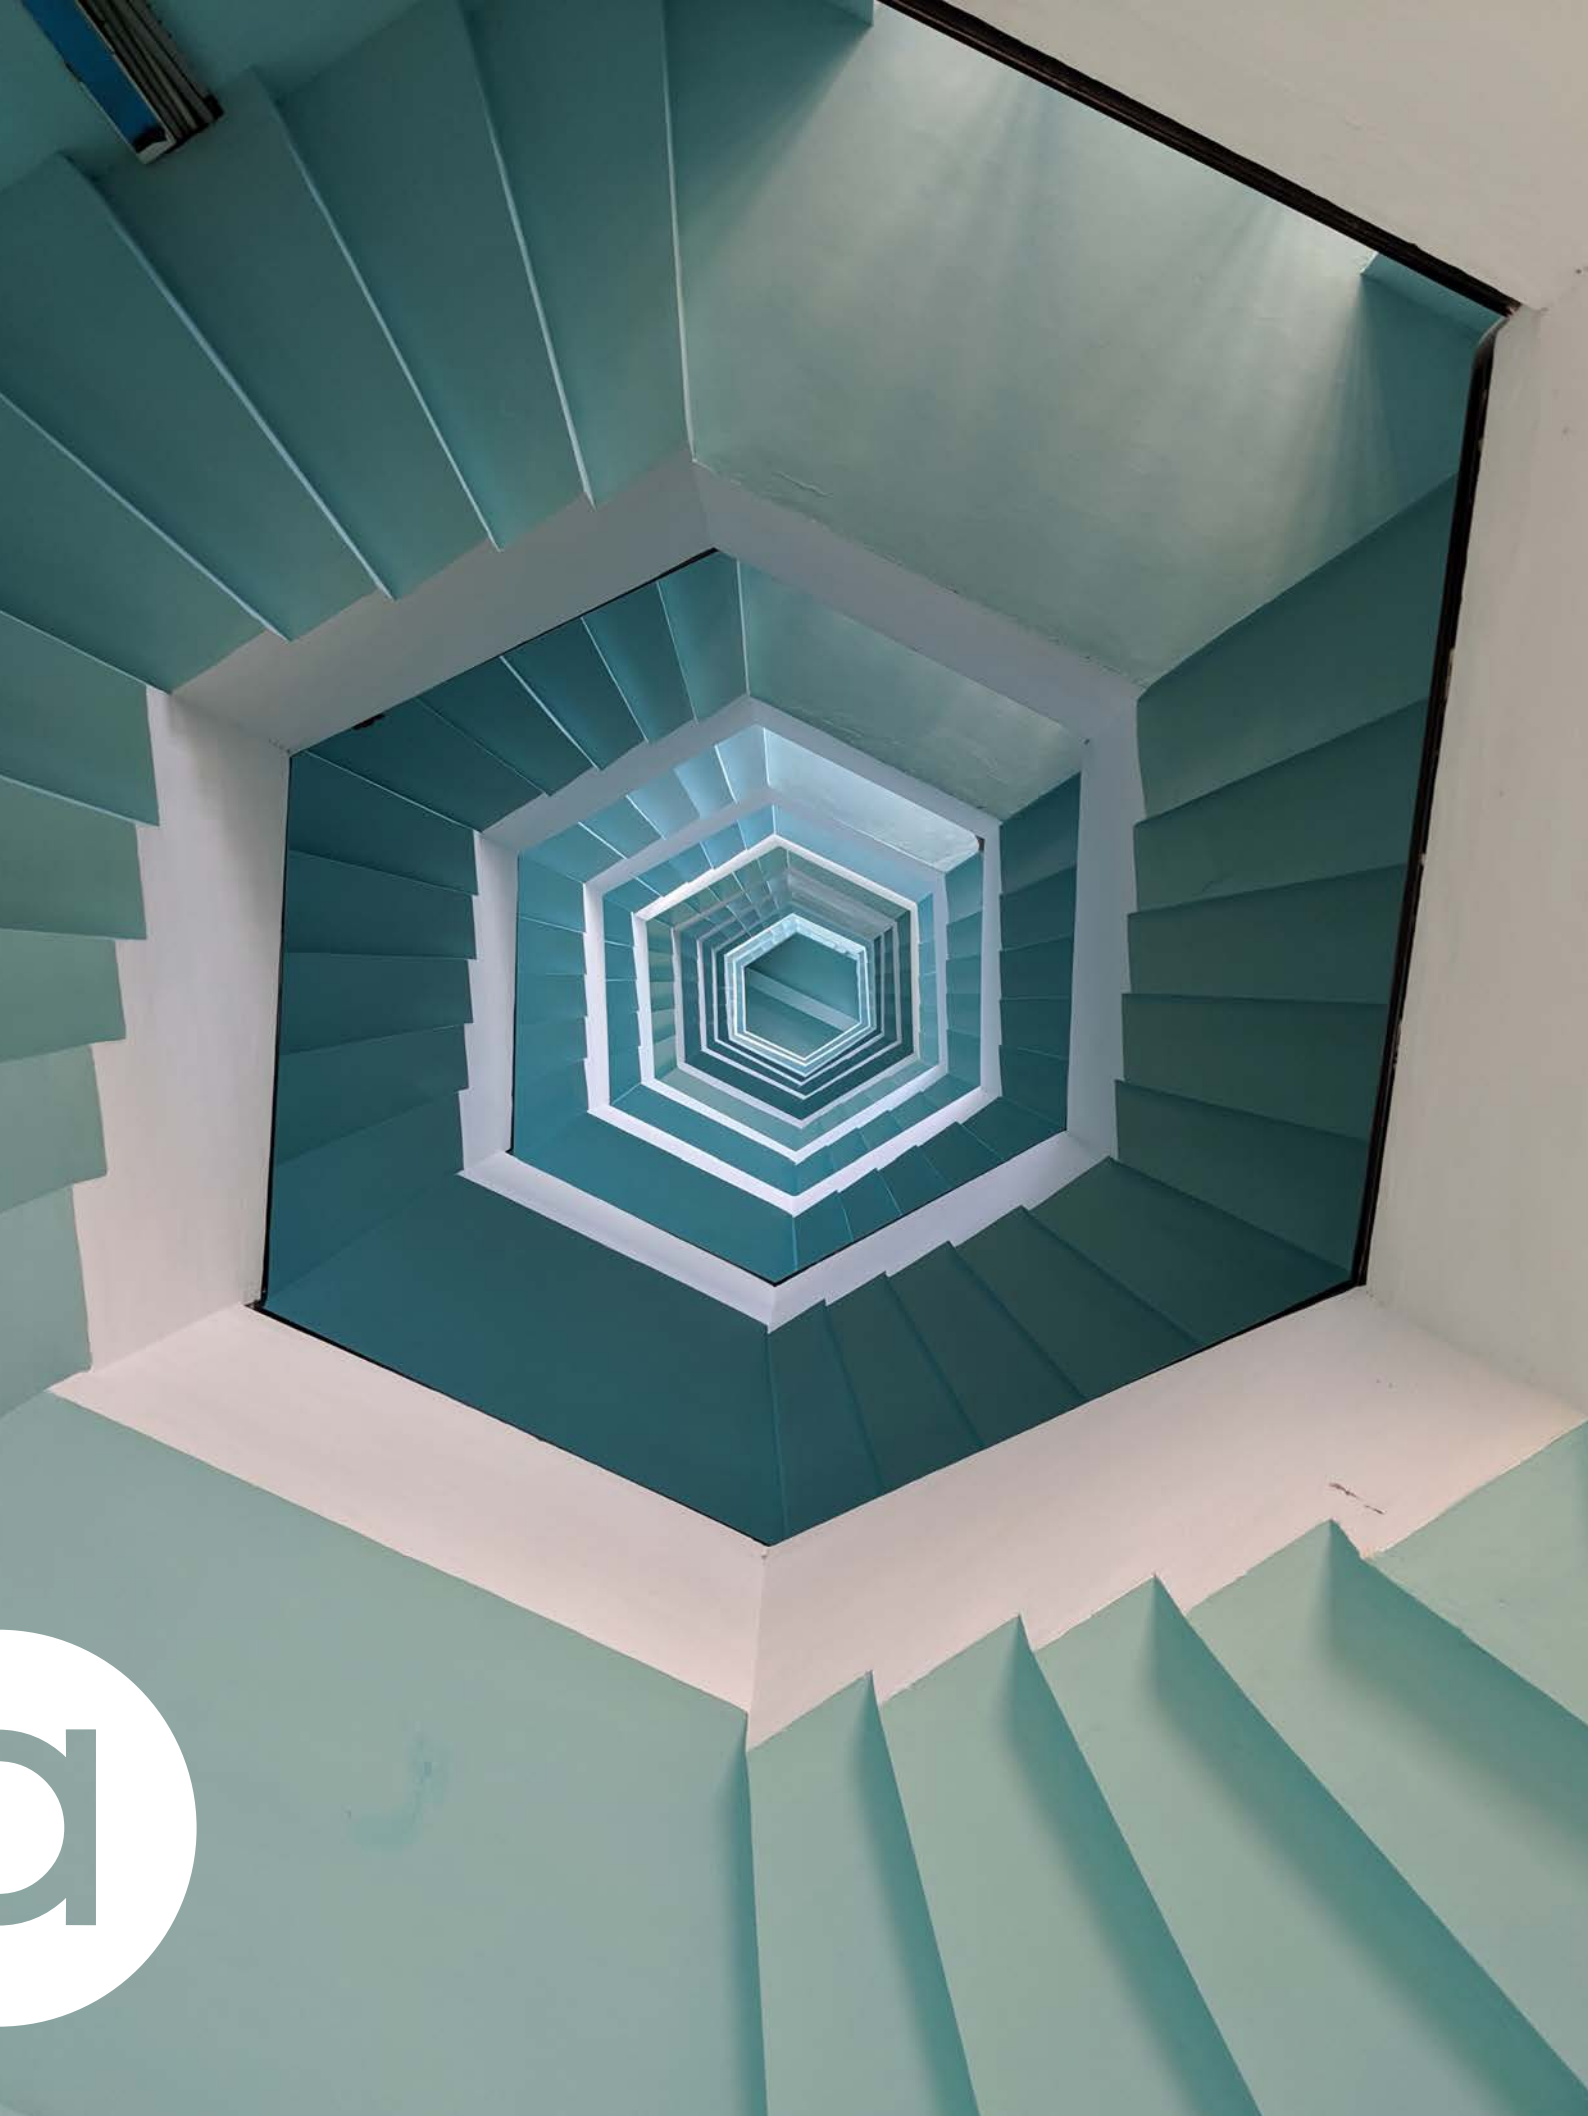

p.u.k.

WALL / STEP LIGHT

STEP

STEP key features

FINISHES

- Textured Grey

TECHNICAL DESIGN


- CREE LED
- 3000K
- Fixed Recessed Mounting
- Ballast Integral
- 1W
- CRI 80
- 60lm
- Asymmetric 80° Beam Angle Distribution
- IP Rating IP65
- IK Rating IK07
- Non-Dimmable
- Stainless Steel AISI 316
- 5-Year Warranty

DESIGN


- Architectural Design
- Textured Finish
- Compact Size
- Slimline Profile
- Even Distribution
- Controlled Illumination
- Robust Design
- Heavy Duty



Quadro

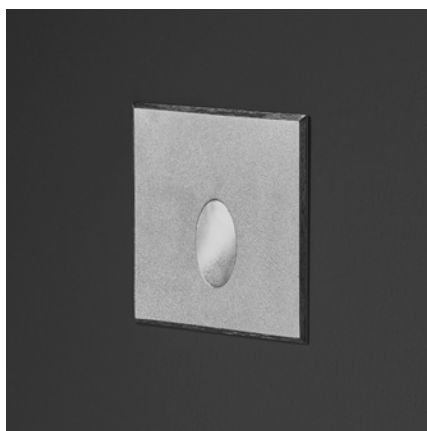


Quadro

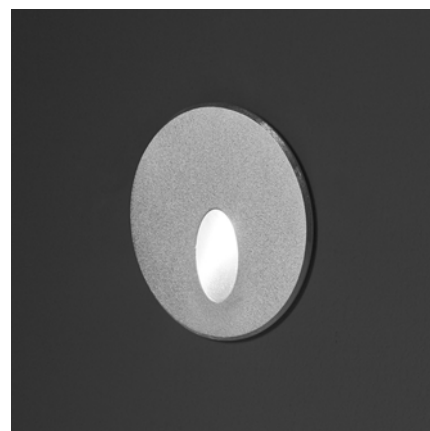



Tondo



STEP TONDO

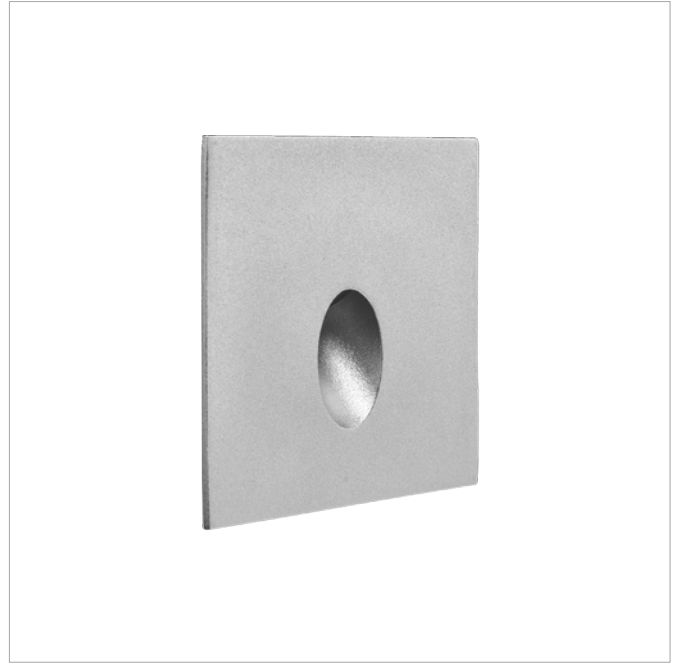

STEP QUADRO

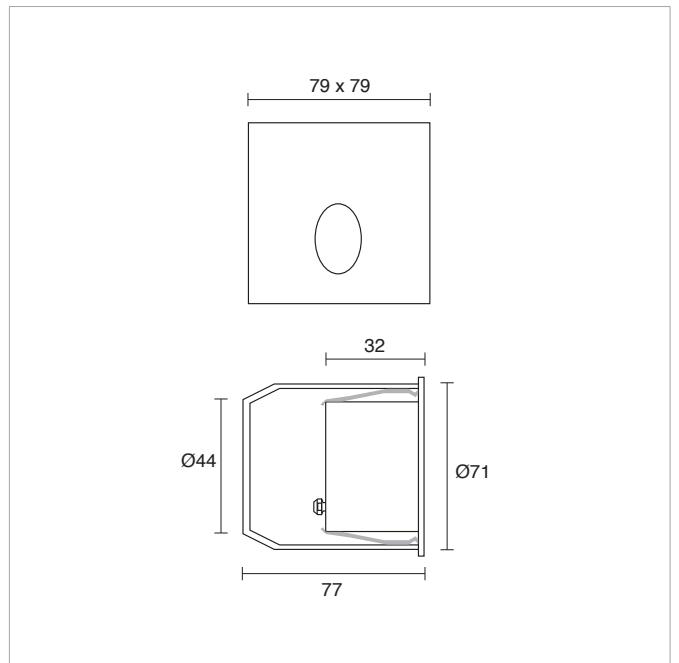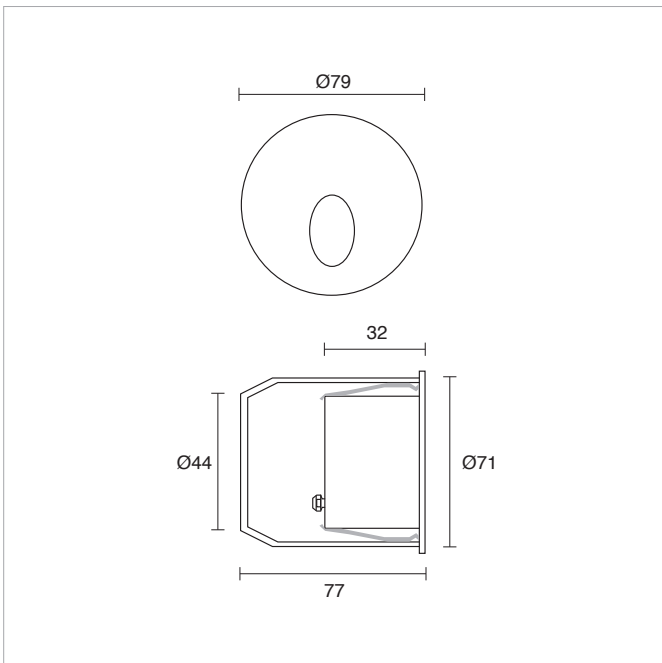



WALL / STEP LIGHT

TWIGGY

TWIGGY key features

FINISHES

- Aged Brass
- Brushed Brass
- Black
- White
- Custom

TECHNICAL DESIGN

CREE XLAMP
XP-G3
2700K / 3000K / 4000K
Ballast Remote
24V DC
1W / 3W
CRI 80
190lm/320lm
10° / 21° / 33° Beam Angle
Distributions
IP Rating IP65
Non-Dim / Phase-Cut /
0-10V / DALI
Optic Glass Lens and
pre-fitted Honeycomb Baffle
2-Year Warranty

DESIGN

Textured Finish
Machined Metal
Honeycomb Lens
Compact Size
Even Distribution
Robust Design




Pillar Wall Light Black




Spot Wall Light White




Inground Black

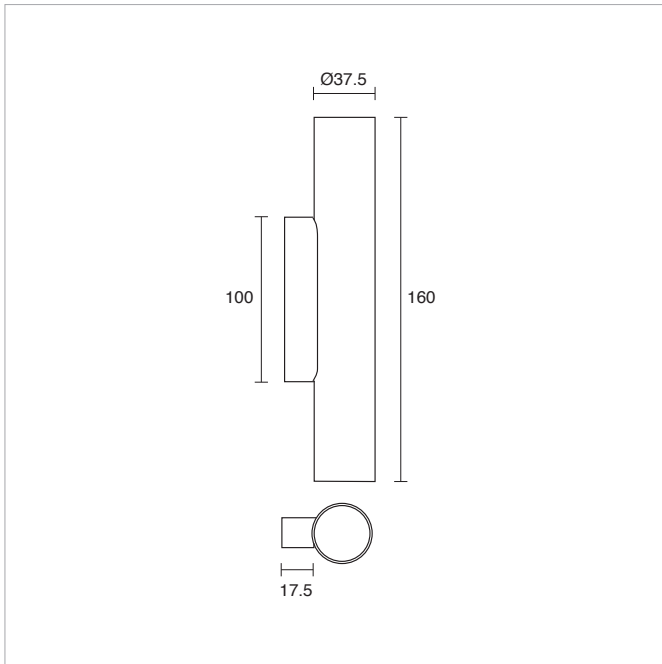

TWIGGY PILLAR WALL LIGHT

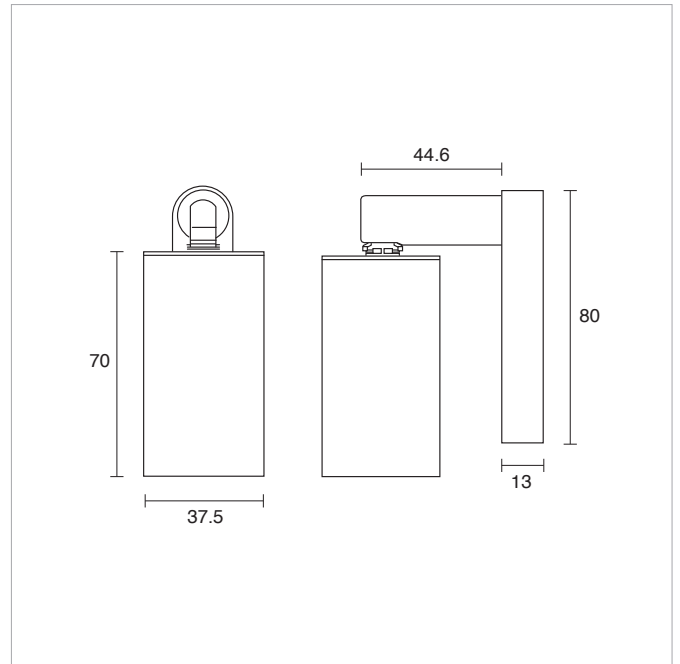

TWIGGY SPOT WALL LIGHT

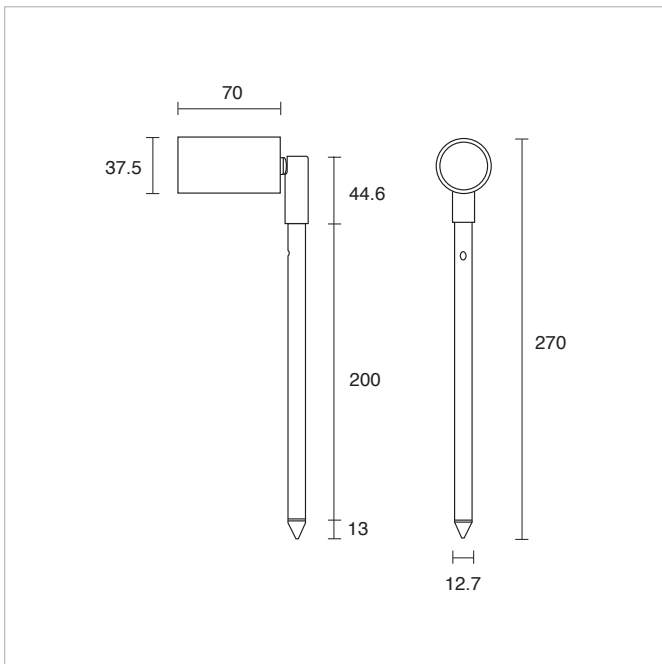

TWIGGY SPIKE INGROUND



WALL / STEP LIGHT

WALL STEP

WALL STEP key features

FINISHES

- White
- Black
- Dark Grey
- Silver

TECHNICAL DESIGN

- SMD LED
- 3000K / 5000K
- Ballast Integral
- 240V
- 4W / 8W
- CRI 80
- 30° Beam Angle Distribution
- IP Rating IP65
- Non-Dimmable
- Lifetime 50000hrs
- 2-Year Warranty

DESIGN

- Architectural Design
- Compact Size
- Slimline Profile
- Even Distribution
- Controlled Illumination



Black




Dark Grey





Silver



WALL-STEP SQUARE

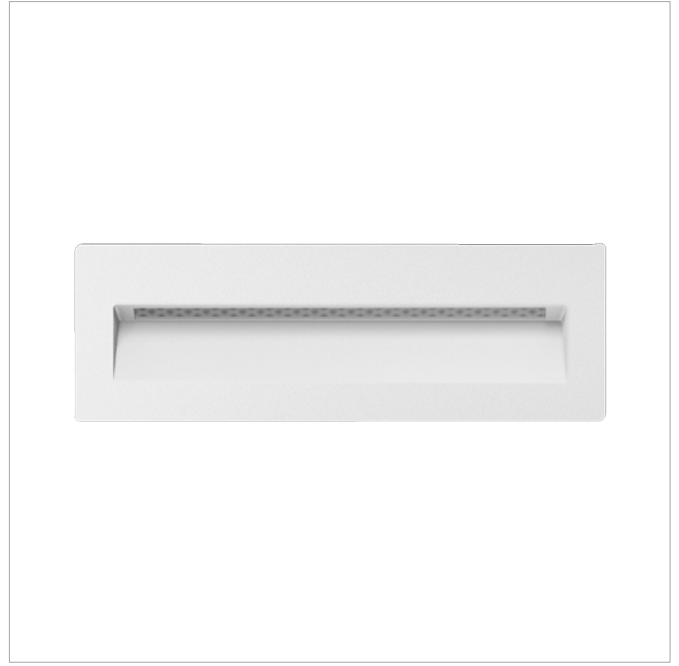

WALL-STEP OBLONG

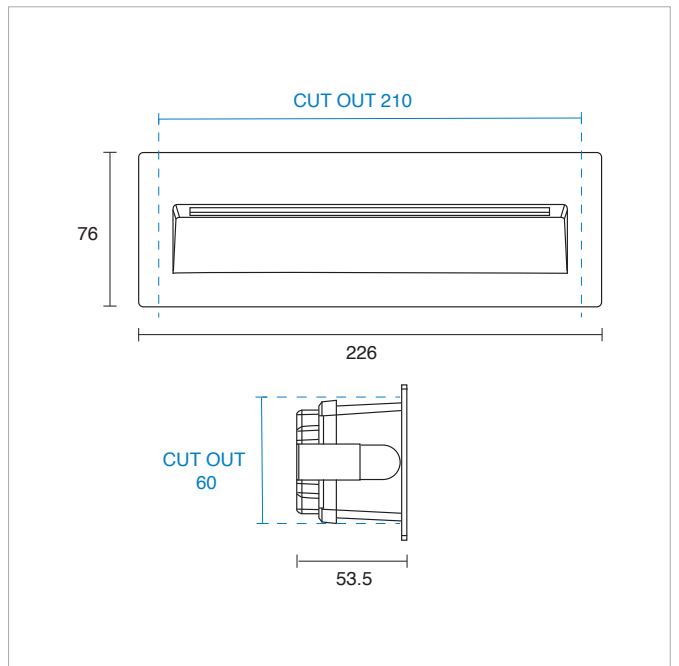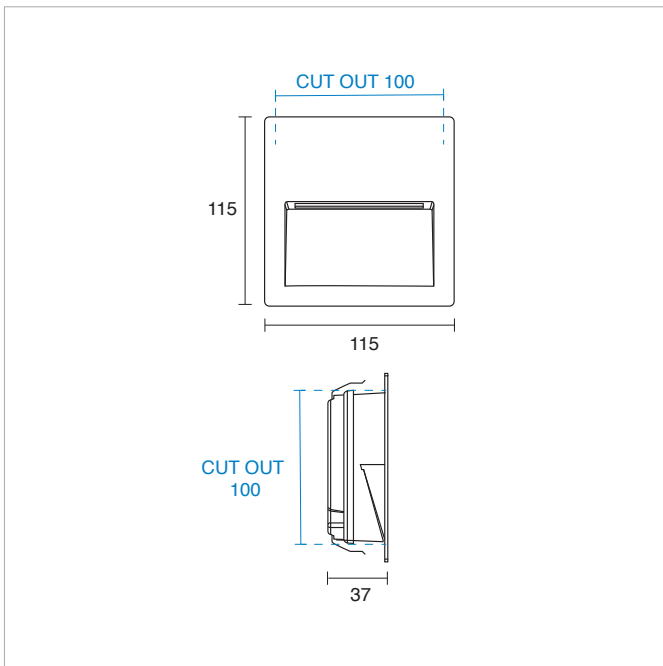

DOWNLIGHT / SPOTLIGHT



EXTERIOR

OUTDOOR RANGE



ANDRO IP54 & IP65 key features

FINISHES


- Textured White
- Textured Black
- Custom

TECHNICAL DESIGN

Tridonic LED
2700K / 3000K / 4000K
240V
10W / 15W / 25W / 35W
CRI 90
Narrow / Medium / Wide /
Flood Beam Angle Distributions
IP Rating IP65/IP54
Non-Dim / Phase-Cut /
DALI / 1-10V
Remote & Integral Driver
Options
5-Year Warranty

DESIGN

Architectural Design
Textured Finish
Compact Size
Controlled Illumination
Low Glare

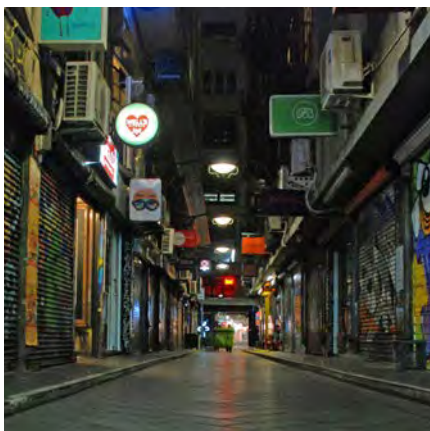

Designed in Melbourne



Made using lighting waste



Perfectly engineered




ANDRO FIXED SURFACE
MOUNTED IP65 WHITE



ANDRO ADJUSTABLE SURFACE
MOUNTED IP54 BLACK


FIXED SURFACE MOUNTED IP65

SIZE	MEASUREMENTS (AxBmm)
XS	Ø 52.2 x 140
S	Ø 62 x 172
M	Ø 75.6 x 210
L	Ø 75.6 x 210

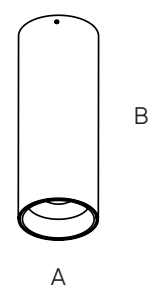

ADJUSTABLE SURFACE MOUNTED IP54

SIZE	MEASUREMENTS (AxBxCmm)
XS	Ø 52.2 x 85 x 85
S	Ø 62 x 100 x 100
M	Ø 75.6 x 120 x 120

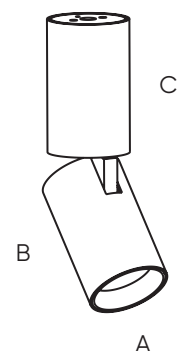



PIREQ IP key features

FINISHES

- Brushed Aluminium
- Matt White
- Matt Black

TECHNICAL DESIGN

LED
3000K
Ballast Remote
240V
11W
Forward Current 500mA
CRI 80
910lm
38° Beam Angle Distribution
IP Rating IP65
Non-Dim / Phase-Cut /
1-10V / DALI
Material Aluminum
Lifetime 40000hrs

DESIGN


Architectural Design
Compact Size
Slimline Profile
Even Distribution
Controlled Illumination
Robust Design
Low Glare



Brushed Aluminium




Matt White

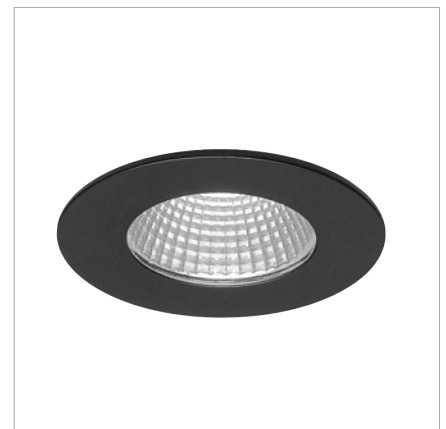



Matt Black



PIREQ IP ROUND

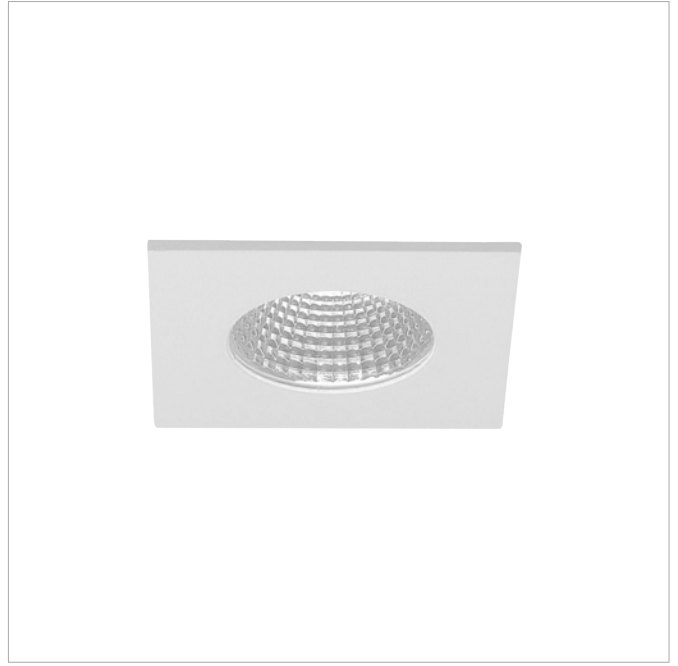

PIREQ IP SQUARE

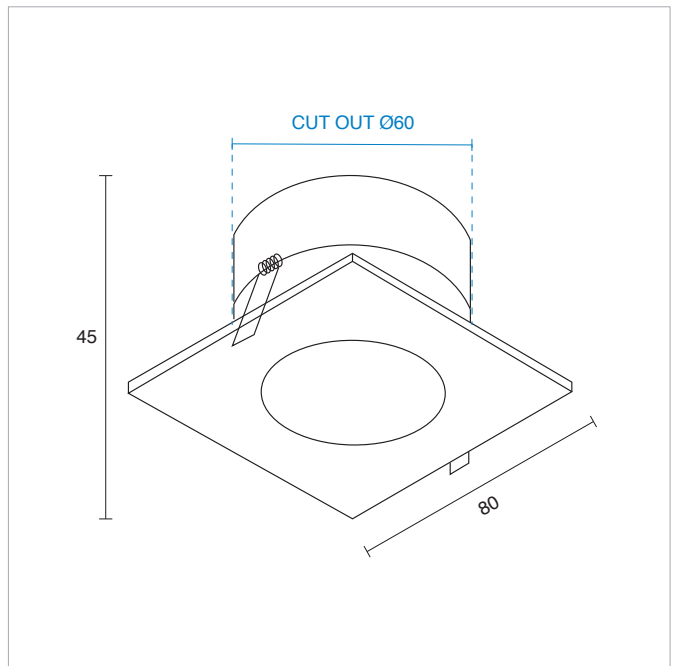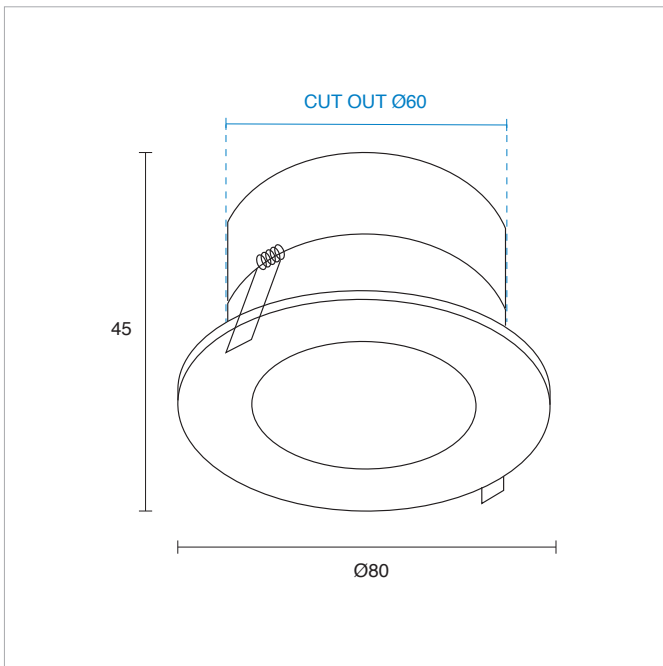

INGROUND



EXTERIOR

OUTDOOR RANGE



ALTEA key features

SIZES

XS

S

M

FINISHES

- Anodised Aluminium
- Stainless Steel
- Brushed Steel

TECHNICAL DESIGN

2700K / 3000K / 4000K

Ballast Remote

24V DC

1W / 2W / 6W

CRI 90

8° / 16° / 30° / 40° / 64° /
16°x40° / Diffused /
Asymmetric Beam Angle
Distributions

IP Rating IP67

IK Rating IK07

Non-Dim / Phase-Cut /
1-10V / DALI

Optic PMMA Lens

Material Anodised Aluminium /
AISI 316L Stainless Steel

2-Year Warranty

DESIGN

Architectural Design

Natural Finish

Compact Size


Shallow Profile

Even Distribution


Controlled Illumination

Robust Design


Heavy Duty

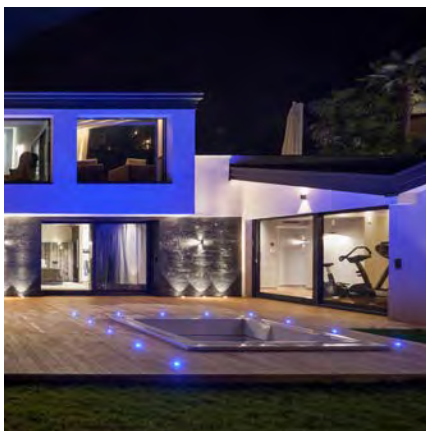


Fixed optic

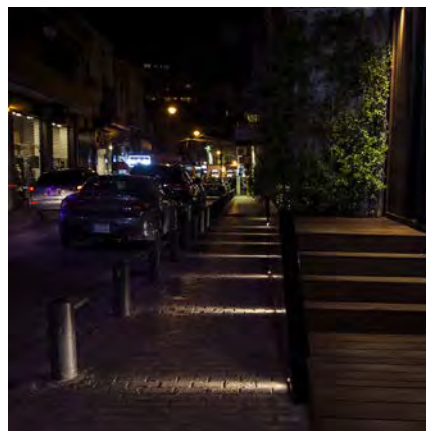

Ideal for walkways

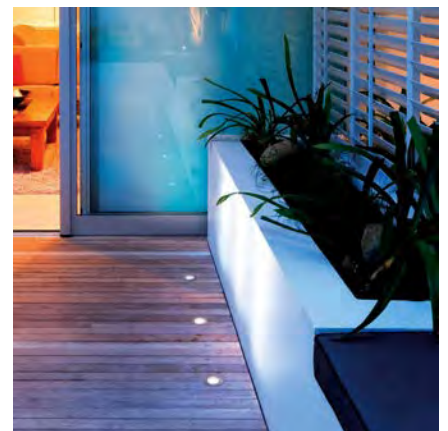

Inground lights

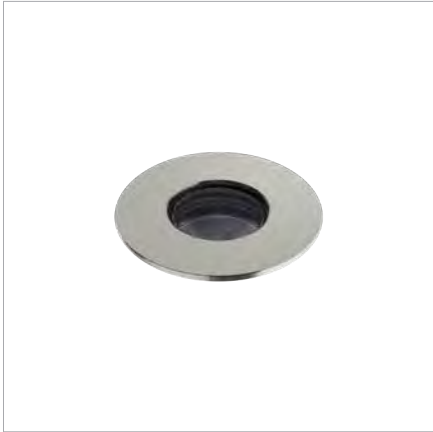

ALTEA XS
ANODIZED ALUMINIUM




ALTEA S
STAINLESS STEEL



ALTEA M
BRUSHED STEEL

ALTEA INGROUND RECESSED

SIZE	MEASUREMENTS (AxBmm)
XS	Ø 26 x 65.5 x Ø 21 - Ø 25 (cut out)
S	Ø 38 x 62 x Ø 33 - Ø 100 (cut out)
M	Ø 65 x 60 x Ø 53 - Ø 100 (cut out)

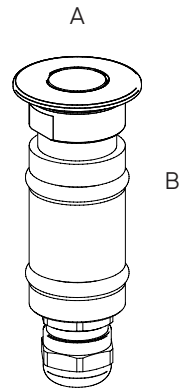



HYDROFLOOR INVISA key features

SIZES

XS

S

FINISHES

● Matt Black

○ Stainless Steel

TECHNICAL DESIGN

CREE LED

3000K / 4000K

Ballast Integral

240V

7W / 15W

CRI 80

15° / 35° / 55° Beam Angle
Distributions

IP Rating IP67

IK Rating IK10

Non-Dimmable / 1-10V / DALI

Tilt Angle 15°

5-Year Warranty

DESIGN

Architectural Design

Textured Finish

Compact Size

Slimline Profile

Even Distribution

Controlled Illumination

Robust Design

Heavy Duty

Low Glare



Safety glass





Ground-recessed



HYDROFLOOR INVISA XS
MATT BLACK



HYDROFLOOR INVISA S
STAINLESS STEEL

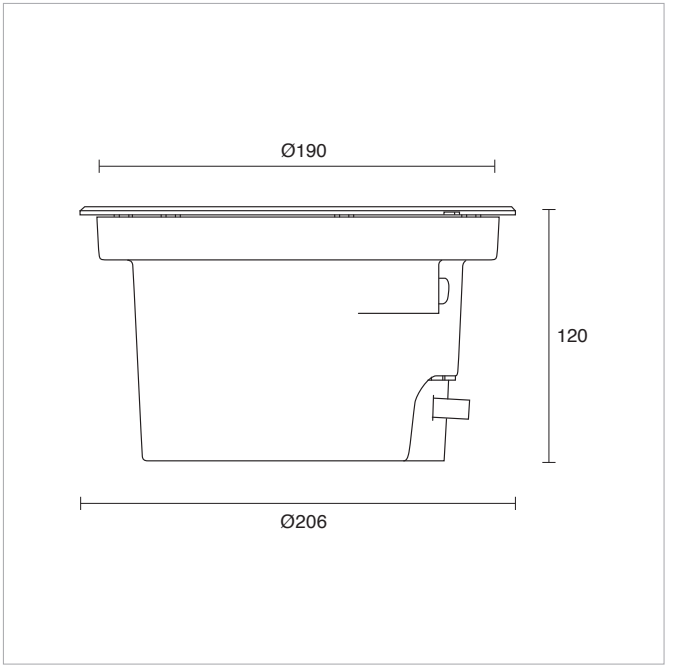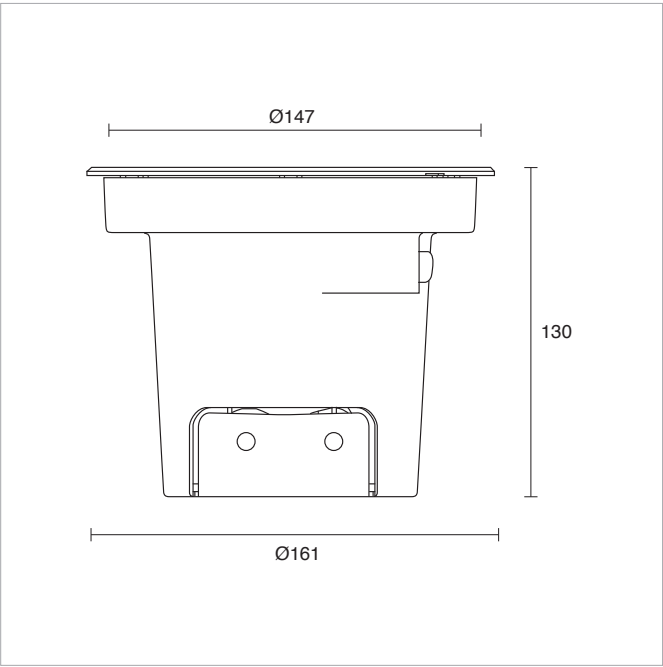


FLOODLIGHT



EXTERIOR

OUTDOOR RANGE

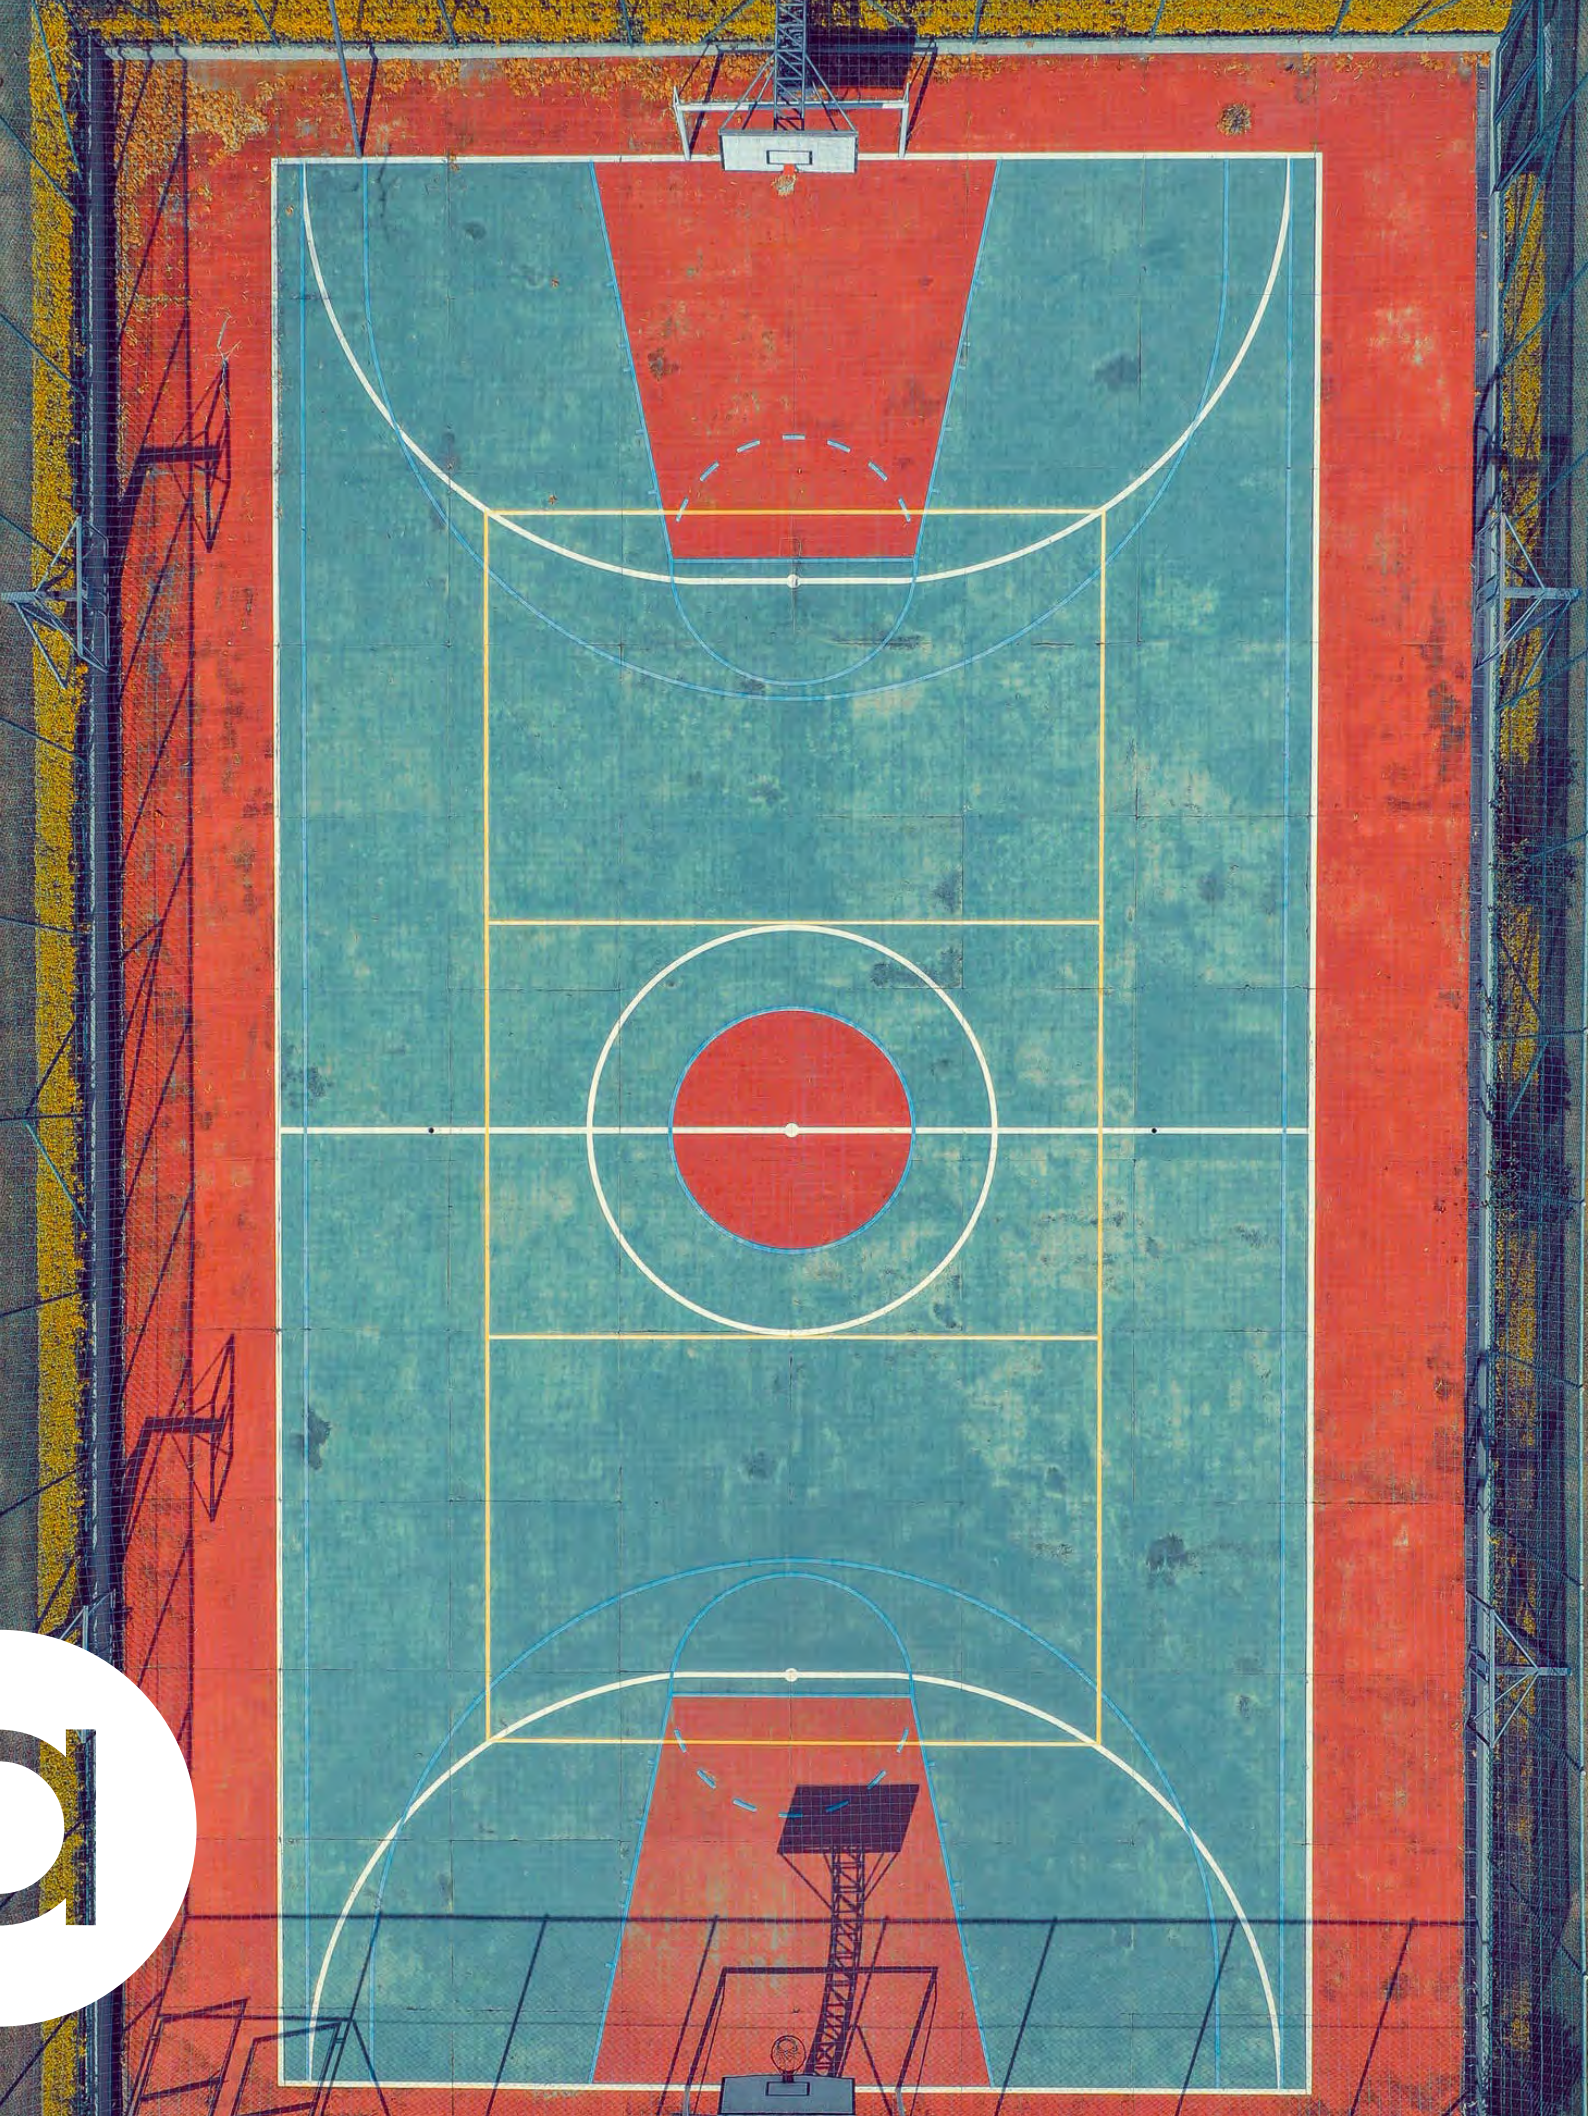

ZEUS key features

SIZES

XS

S

FINISHES

- Matt Black
- Anthracite Grey
- Textured Grey

TECHNICAL DESIGN

CREE LED

3000K / 4000K

Ballast Integral

240V

8W / 20W

CRI 80

15° / 35° / 55° Beam Angle Distributions

IP Rating IP66

IK Rating IK09

Non-Dimmable / 1-10V / DALI

Material Die-Cast Aluminum

Tilt Angle +90° / -40°

Rotate Angle 355°

5-Year Warranty

DESIGN

Architectural Design

Textured Finish

Compact Size

Slimline Profile

Wide Distribution

Controlled Illumination


Robust Design

Heavy Duty

Low Glare



S Floodlight

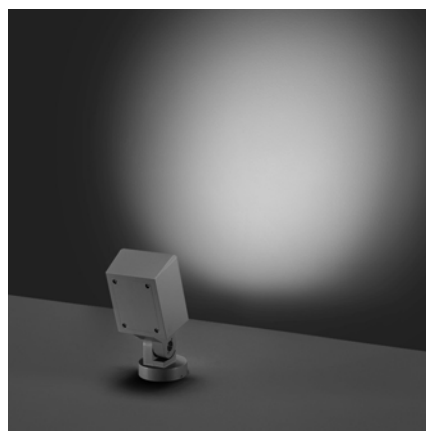

Various beams





XS Floodlight



ZEUS XS TEXTURED GREY



ZEUS S ANTHRACITE GREY

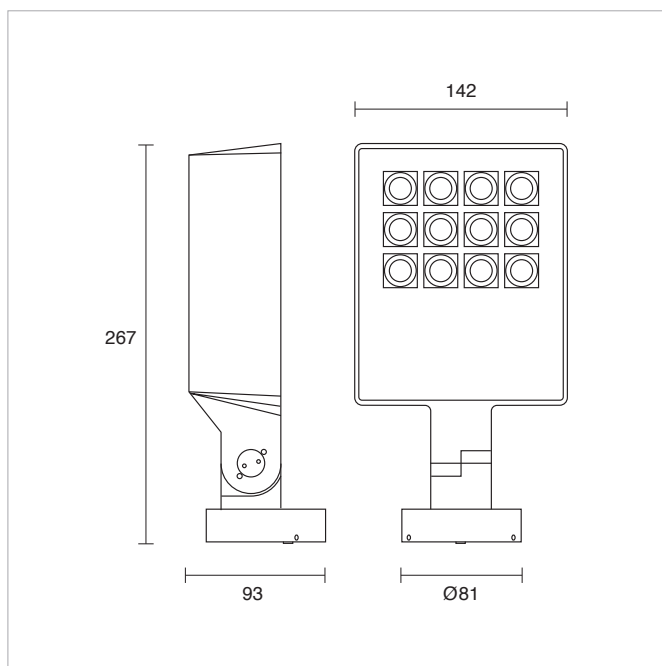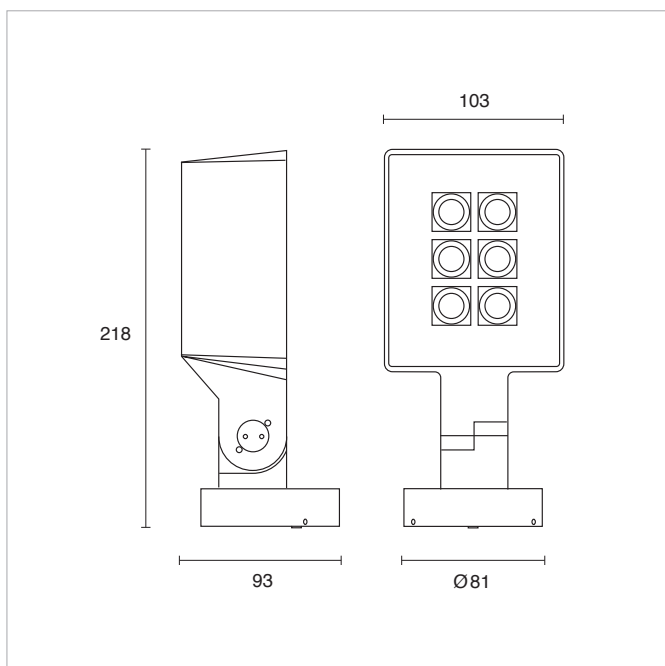

DECORATIVE



EXTERIOR

OUTDOOR RANGE



ROTOBALL SWING key features

45

SIZES

XS

S

FINISHES

● Grey

TECHNICAL DESIGN

A60 LED Lamp

E27 Base

2700K

Suspended Mounting

240V

Max 24W

Rotational Symmetric Beam
Angle Distribution

IP Rating IP44

Non-Dimmable

Material Steel

DESIGN

Unique Design

Restrained Distribution

Delicate Illumination

Robust Design

Various Mounting Heights

Detachable Chain

Warm Inviting Environment



Rotoball Swing





Functional and elegant




ROTOBALL SWING XS SUSPENDED



ROTOBALL SWING S SUSPENDED

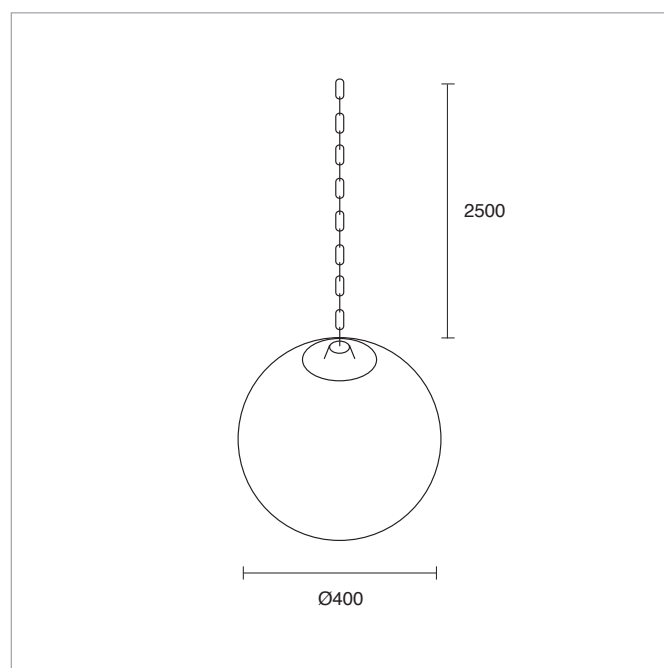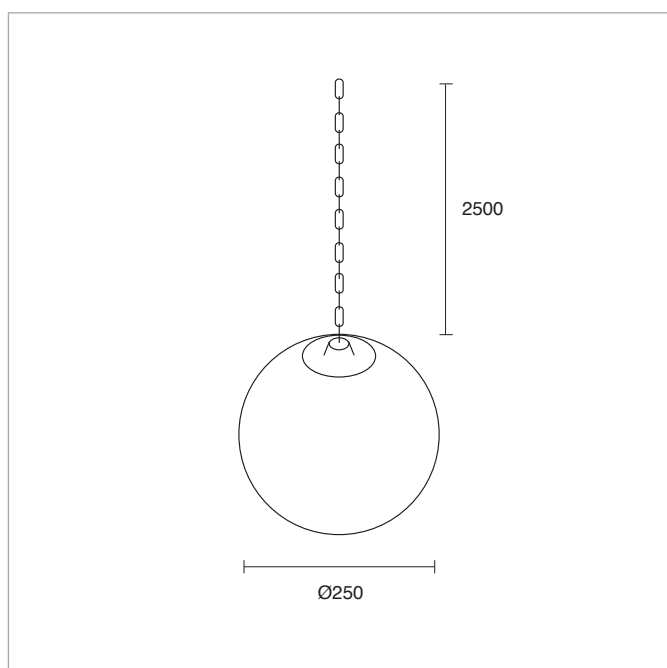

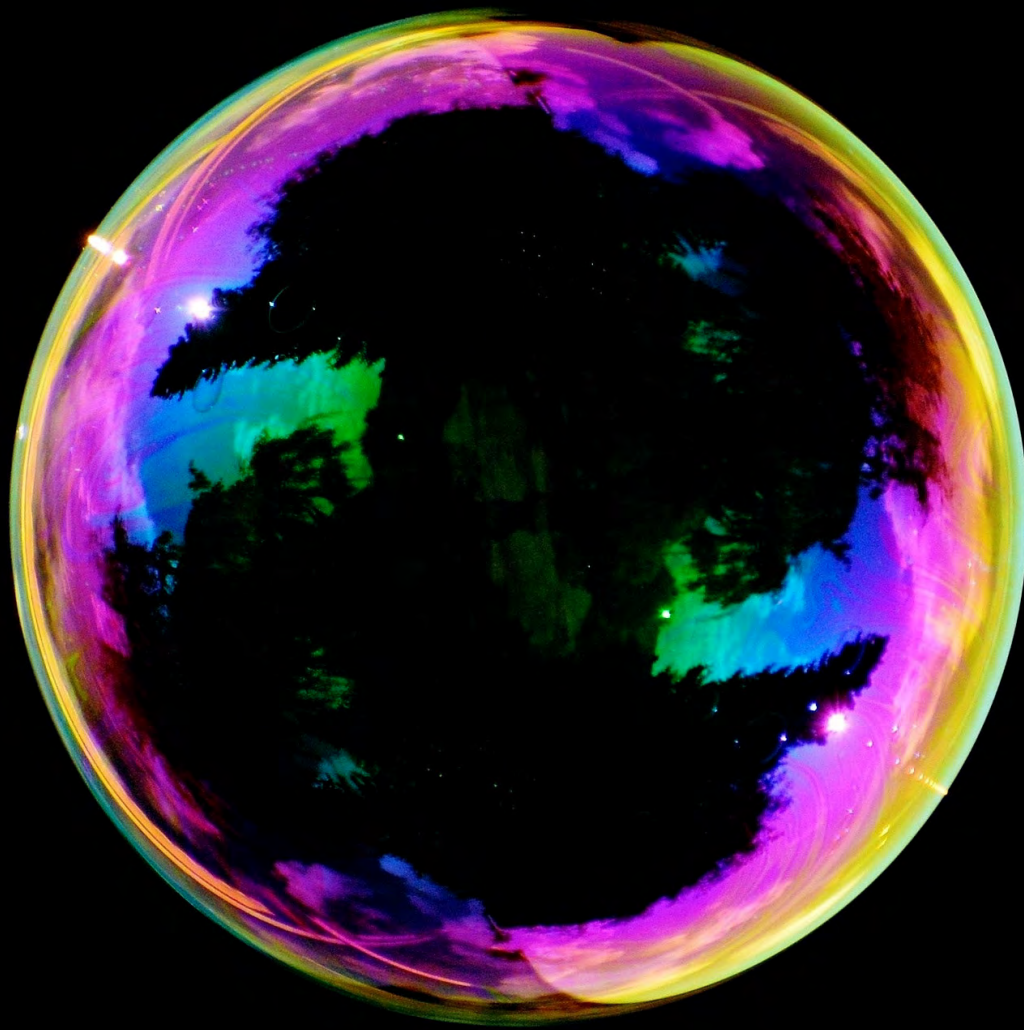

STELLA key features

SIZES

XS

S

FINISHES

- Aged Brass
- Brushed Brass
- Black
- White
- Custom

TECHNICAL DESIGN

XHP-50 Gen 2

2700K / 3000K / 4000K

Ballast Remote

Forward Voltage 6V DC

4W

Forward Current 350mA

CRI 80

300lm

Diffused Beam Angle
Distribution

IP Rating IP44

Non-Dim / Phase-Cut /
0-10V / DALI

Optic Frosted Glass

2-Year Warranty

DESIGN

Unique Design

Restrained Distribution

Delicate Illumination

Machined Metal

Various Mounting Heights

Warm Inviting Environment

Opal Or Crackle Sphere



Aged Brass




Brushed Brass



Black

**STELLA WALL LIGHT****STELLA CRACKLE****STELLA SUSPENDED****WALL LIGHT FIXED SURFACE MOUNTED**


SIZE	MEASUREMENTS (AxBxCmm)
XS	Ø 100 x Ø 47 x 25
S	Ø 150 x Ø 47 x 25

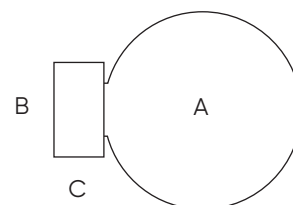**CRACKLE WALL LIGHT FIXED SURFACE MOUNTED**

SIZE	MEASUREMENTS (AxBxCmm)
XS	Ø 100 x Ø 47 x 25

ROD SUSPENDED

SIZE	MEASUREMENTS (AxBmm)
XS	Ø 100 x 150
S	Ø 150 x 150

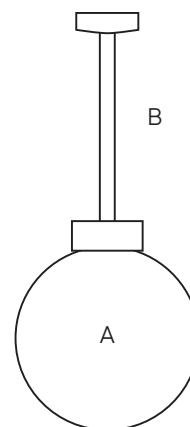

Research, innovation and creativity. Introducing our great outdoors.

Outdoor lighting is one of the most challenging mediums of design. It goes without saying that users demand products of maximum quality – but importantly we are also constantly looking for innovative solutions, technical excellence, and consistent performances for the awe-inspiring and sophisticated world of outdoor luminaire design.

Our product range features a mix of locally-designed and produced luminaires, as well as products from our premium partners in Germany and Italy. We believe this is one of the most complete and competitive world-class collections available on the international market.

ambience

MAKING LIGHT WORK

+61 3 9486 3699

sales@ambienclighting.com.au

ambienclighting.com.au

Cover Image:
Pivot House, Eaglemont