


OLIO ROUND TRIMLESS ADJUSTABLE RECESSED

CREATE / DOWNLIGHT

ambience

MAKING LIGHT WORK

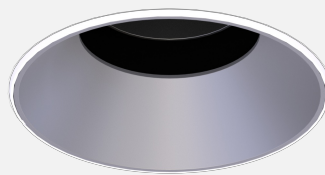

PHYSICAL

Size	S, M, L, XL
Installation Method	Adjustable Recessed
Cutout Size (mm)	Ø70mm, Ø108mm, Ø132mm, Ø158mm
Accessories	Honeycomb Louvre, Without Accessory
IP Rating	IP20
Finish	Textured White, Textured Black, Custom
Rotate Angle	355°
Tilt Angle	30°
Anti-Glare Ring Finish	Textured Black, Custom
Secondary Reflector Finish	Matt, Textured White, Textured Black, Specular, Chrome, Gold, Custom

ELECTRICAL

Wattage	9W, 13W, 15W, 21W, 28W, 42W
Forward Current	250mA, 350mA, 500mA, 700mA, 1050mA
Voltage	240V
Dimming Control	1-10V Dimmable, DALI Dimmable, Phase-Cut Dimmable

MEDIUM



WIDE



FLOOD



CE

RoHS



O P T I C A L


Optic	Lens, Reflector
Distribution	Medium / Wide / Flood
CCT	2700K, 3000K, 4000K
CRI	CRI90
System Lumen	525lm - 2600lm
System Efficacy	Up to 69lm/W
Light Output Ratio	85
Lifetime (L70B50)	50,000hrs




IP20

A D D I T I O N A L


LED Module	Citizen
LED Driver	Remote
Warranty	5 Years

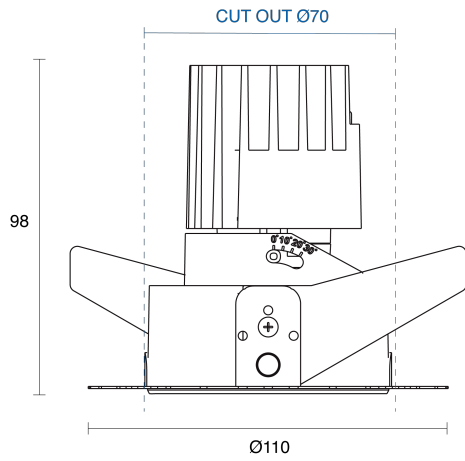


Olio S Round Trimless

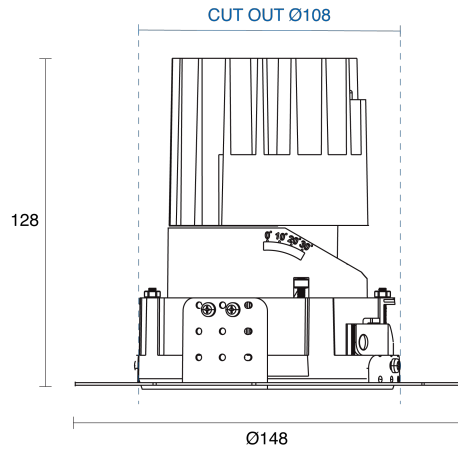

Olio M Round Trimless

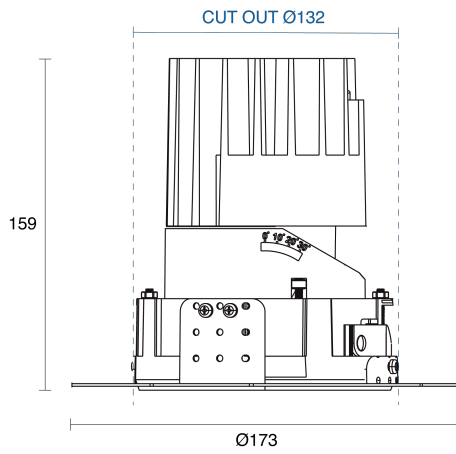

Olio L Round Trimless

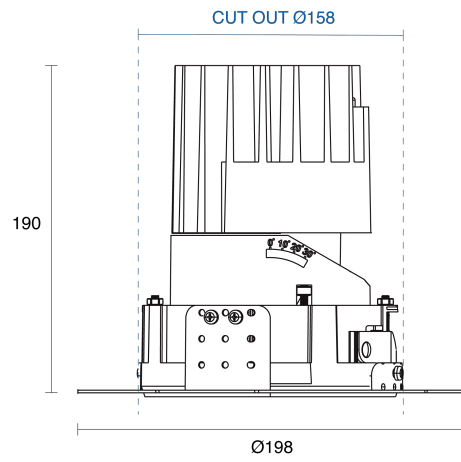

Olio XL Round Trimless